


Calibration With Splash Guard (Option -s)

ITEMS REQUIRED TO CALIBRATE A GAS DETECTOR WITH A SPLASH GUARD USING A 34L, 58L, 78L OR 100L CYLINDER OF GAS:

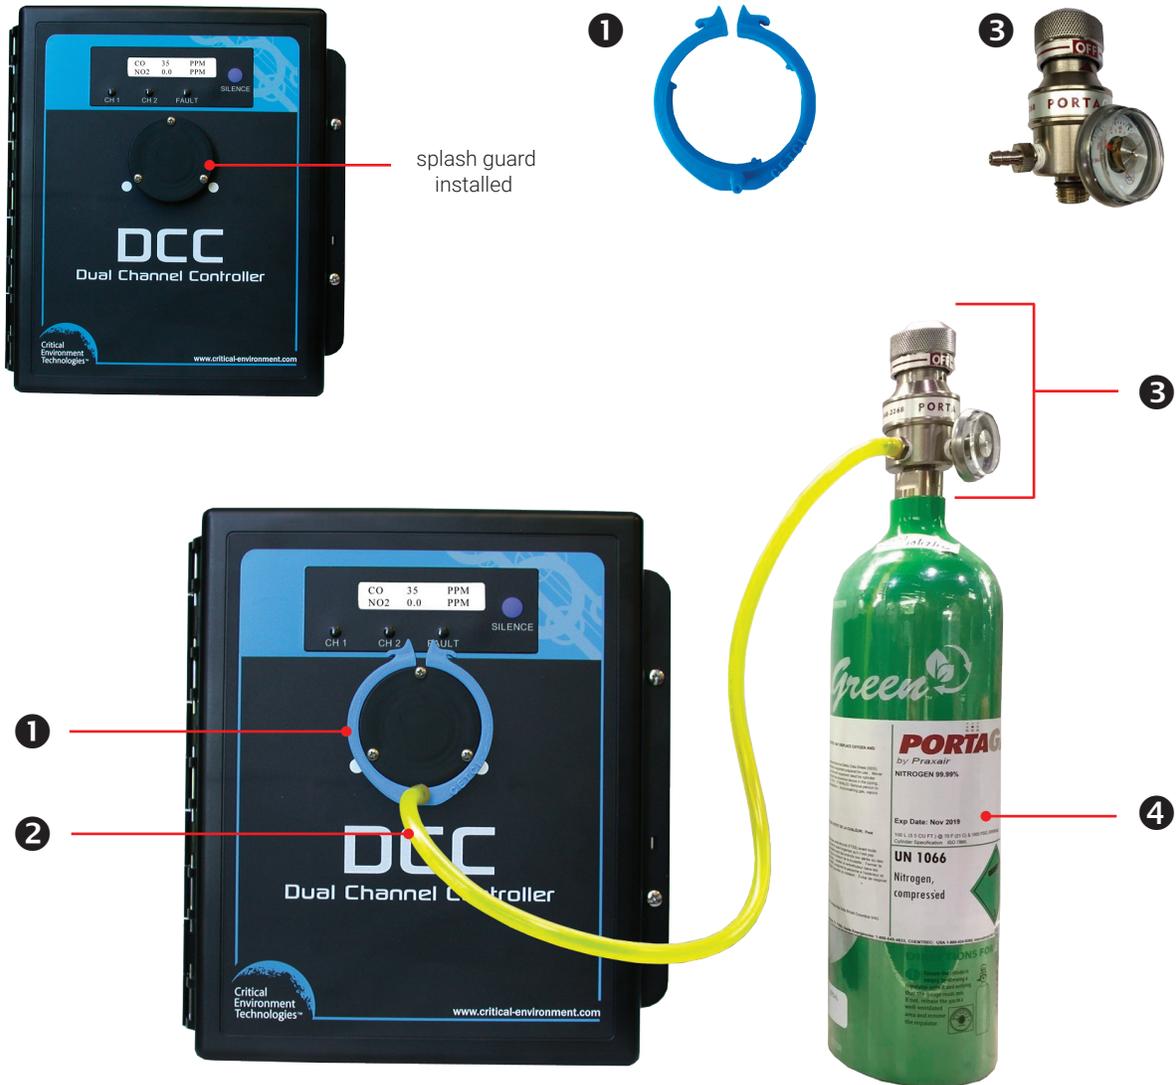

| NUMBER | FUNCTION | PART NUMBER |
|--------|---|--------------|
| 1 | Cal Clip for calibrating with splash guard. Comes with tubing attached (see 2) | CET-SGC |
| 2 | Standard tubing (approx 61 cm / 2 ft long) included and attached to calibration adapter plug | n/a |
| 3 | Regulator for fixed flow @0.5 LPM. Fits 34 L, 58 L, 74 L, and 100 L cylinders | REG-0715-CR2 |
| 4 | Span Gas / Zero Gas cylinder, with air balance or nitrogen balance (electrochemical sensors), with air balance only (catalytic sensors) | various |