

# mini FLOWWATCH® 3 WiFi

**SICCOM**

As a real product of predictive maintenance, the mini FLOWWATCH® 3 WiFi allows to remotely supervise a fleet of pumps and to anticipate a maintenance on a pump or an air conditioner. For air conditioners up to 10kW / 36000BTU.

Ref: DE05WFCC760



The first  
condensate pump  
WiFi connected




Monitor your **pump fleet**  
in the blink of an eye!

Pump name	Alarm	Maintenance to be done
Pump Reception hall	OK	Yes
Pump Breakfast room	OK	No
Pump Room 001	NOT OK	No
Pump Room 002	OK	No
Pump Room 003	NOT OK	Yes
Pump Room 004	OK	Yes
Pump Room 005	OK	No
Pump Room 006	OK	No

View all pump datas

Pump Room 001	
Pump name	Pump Room 001
Commissioning date	05/10/2019 - 08:24
Last maintenance date	04/11/2019 - 11:13
Maintenance to be done	No
Alarm overheating	OK
Alarm float high level	NOT OK
Alarm AC Freeze up	OK
Condensate temperature	11°C
Pump temperature	21°C

The pump sends you an email  
when an alarm triggers!

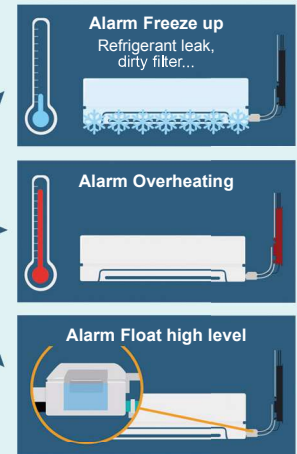


## SPECIFICATIONS

Flowrate max	15 l/h
Suction head max	2 m
Discharge head	10 m
Electrical power	21W
Voltage	220-240V 50/60Hz
Alarm	NC
Noise level*	
Protection rating	IPX4
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.6 m
Dimensions	272 x 35 x 43 mm / 75 x 38 x 36 mm

\* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

\*\* The pump is able to run 100% of the time if necessary.

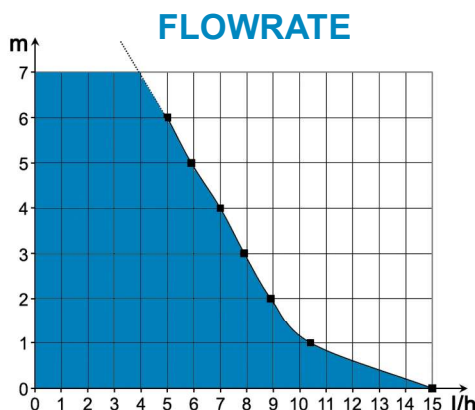

## BENEFITS



### Web interface

The interface is accessible from a computer, smartphone, or tablet and requires no software or application installation.



### Email sending in case of alarm

Be notified immediately in the event of a malfunction (3 alarm cases).



### Real-time supervision

Access a wealth of information about your pump fleet in just a few clicks.



### Pump interconnection

Create a network of pumps, and allow them to communicate with each other for more productive management of your pump fleet.



### Extremely silent

The quietest pump of our range (18.6 dBA), for an installation in any room.



### Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

## CONTENTS

Pump - Reservoir with air-vent tube - Reservoir stand - Double-side adhesives - Inlet tube - Suction tube 1.8m - Clamps