


mini FLOWATCH® 0

Mini solenoid pump simple and economic for the condensate removal of air conditioners **up to 8kW / 27000BTU**.

SICCOM

Ref: DE05LCB980

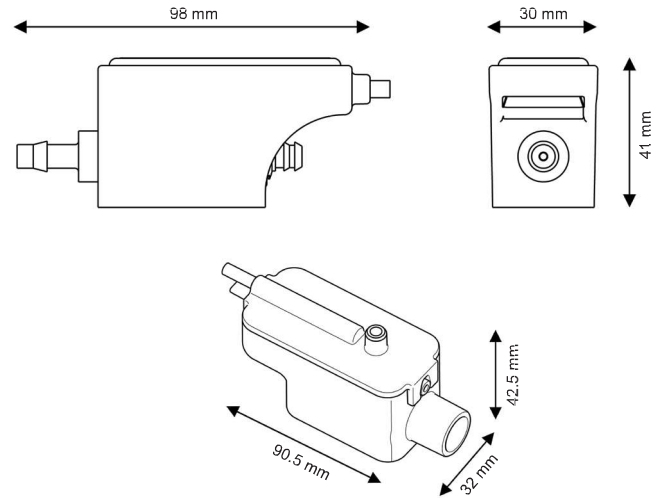

Hose diameter
Suction : 6/9 mm - not supplied
Discharge : 6/9 mm - not supplied

SPECIFICATIONS

Flowrate max	10 l/h
Suction head max	1.5 m
Discharge head	10 m
Electrical power	11W
Voltage	220-240V 50Hz only
Alarm*	No alarm
Noise level**	
Protection rating	IP20
Thermal protection	Yes
Operating cycle***	100%
Power cable	1.5 m
Dimensions	98 x 30 x 41 mm / 90 x 32 x 42 mm

* Alarm option available on request.

** Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

*** The pump is able to run 100% of the time if necessary.

BENEFITS



Removable reservoir

Can be easily unclipped in order to clean the reservoir and the float.



Integrated filter

Plastic filter integrated to the reservoir. It prevents big impurities to damage the pump.



Accessories included


All necessary accessories are included in the box.



Compact pump

Very small, pump and reservoir are easy to install.

FLOWRATE

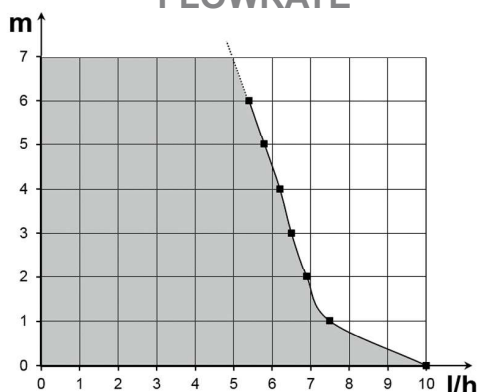

CONTENTS



Pump - Reservoir - Double-side adhesive for reservoir fixing - Inlet tube - 3 clamps