




Inframate-ppm Infrared Leak Detector





Probe length



9.84in+9.84in(extended)

Weight



450 g

- Battery Type: Lithium-ion battery
- Charging Type: Type-C
- Charging Time: About 3 hours
- Operating Time: 8 hours
- Resolution: 1ppm
- Maximum Sensitivity : 3g/yr

Quantitative Infrared Leak Detector

**0-19999
PPM**

PPM Display
0-19999PPM



Strong
Anti-interference

OTA

OTA
Updates

SAE

SAE
Standard



Fast
Response




Up to 50000 Hours
Sensor Life




Large Display Hunting and Pinpoint Mode

Curve Display & Data Record: 0-19999PPM

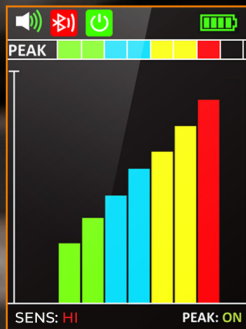

Pinpoint Mode

Find the exact
leak location

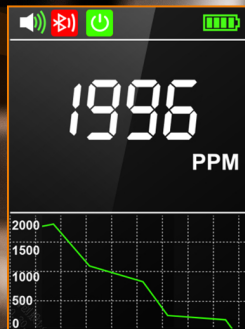

Hunting Mode

Quickly find the
general leak area



Detect All Halogenated Refrigerants

HFC: R134a, R410A, R407C, R417A, R404A, R507, R23, R508A, R508B, R152a, R32 etc.

HCFC: R22, R123, R124, R141b, R142b, R402A, R402B, R408A, R409A etc.

CFC: R11, R12, R13, R502, R503 etc.

PFC: PFC-14, PFC-116, PFC-218 etc.

HFO: R-1234YF.





Authorized Distributor

APL ASIA CO., LTD.


11/129-132 Moo.5 Lamlukka Rd., T.Kookut, A.Lamlukka, Pathumthani 12130 Thailand.

TEL. 0-2995-4461-3, FAX. 0-2995-4464

www.apl-asia.com

EMAIL : sales@apl-asia.com

LINE@ : @APL-ASIA

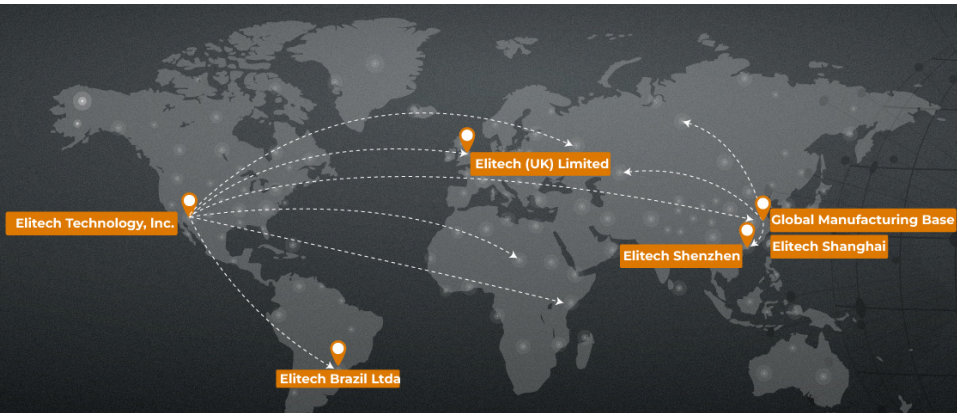

Elitech®

Innovation Preceding All