

# ECOTANK+ 1.2 / 2.5

**SICCOM**

Centrifugal tank pump for the removal of condensates from air conditioners, refrigerated displays or gas condensing boilers.

Ref ECOTANK+ 1.2 50Hz: DE12QCC610  
 Ref ECOTANK+ 2.5 50Hz: DE25QCC620  
 Ref ECOTANK+ 2.5 60Hz: DE25QCD140



**pH > 2.5**




## SPECIFICATIONS

	50Hz version	60Hz version
Flowrate max	300 l/h	400 l/h
Discharge head	4.6 m	6 m
pH tolerated	pH > 2.5	pH > 2.5
Condensates max temp.	40°C	40°C
Electrical power	65W	65W
Voltage	230V 50Hz	230V 60Hz
Alarm	NO-NC	NO-NC
Noise level		
Protection rating	IP24	IP24
Thermal protection	Yes	Yes
Operating cycle*	30%	30%
Cable length	1.5 m	1.5 m
Dimensions ECOTANK+ 1.2	280 x 130 x 129 mm	
Dimensions ECOTANK+ 2.5	280 x 130 x 159 mm	

\* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

\*\* The pump is able to run 30% of the time if necessary.

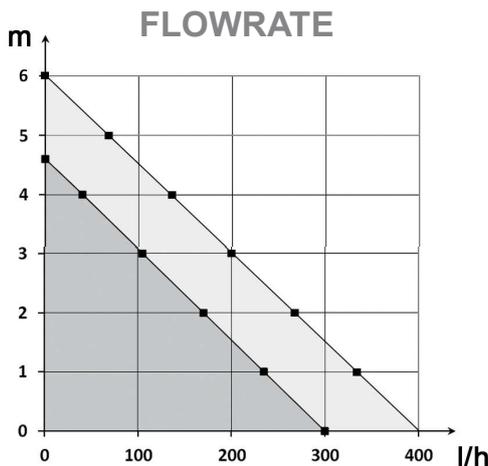

## BENEFITS



### IP24 protection

The pump is protected against water splashes.



### Universal electric plug

Power/alarm cable can be taken off, making easy installation and maintenance.



### Outlet for 6/9 or 9/12 mm tube

Thanks to its connector supplied, the discharge can be made with a 6/9mm or a 9/12mm tube.



### High capacity tank

Thanks to its 2.5 l tank, the ECOTANK+ 2.5 reduces the number of pumping cycles and answers to a great deal of applications.



### Compact tank pump

With only 129mm height, the ECOTANK+ 1.2 fits easily in any space.



### Reversible tank

Turning the tank allows to fit in any configuration.



### PVC clear tube included (only in 60Hz version)

A 6m discharge tube (10x13mm diameter) is included in the ECOTANK+ 2.5 60Hz version.



## CONTENTS

Pump - Cable power / alarm - 6/9mm outlet adaptor - Screws and rawplugs - PVC clear tube 6m (only in 60Hz version)