


Monoblock wall pump simple and economic for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LCC440

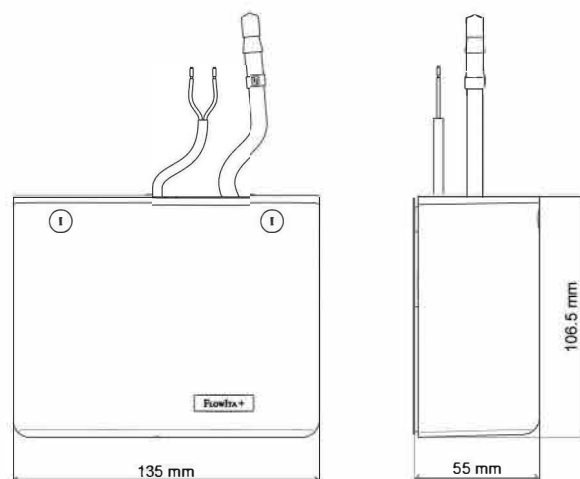

Hose diameter

Discharge - 6/9 mm - Not supplied

## Specifications

Flowrate max	13.2 l/h
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	No alarm
Noise level	N/C
Protection rating	IP20
Thermal protection	Yes
Operating cycle*	100%
Power cable lenght	0.8 m
Dimensions	135 x 106.5 x 55 mm

\* The pump is able to run 100% of the time if necessary.

## Benefits



### Anti-vibration stand

Reduces vibrations and noise level of the pump.




### Integrated reservoir

The 185 ml reservoir allows a reduction of pump cycle number.



### Accessories included

All necessary accessories are included in the box.




### Quick installation

The FlowIta+ can be installed easily and quickly underneath any air conditioner.



## Pack contents

Pump - Screws and rawlplugs

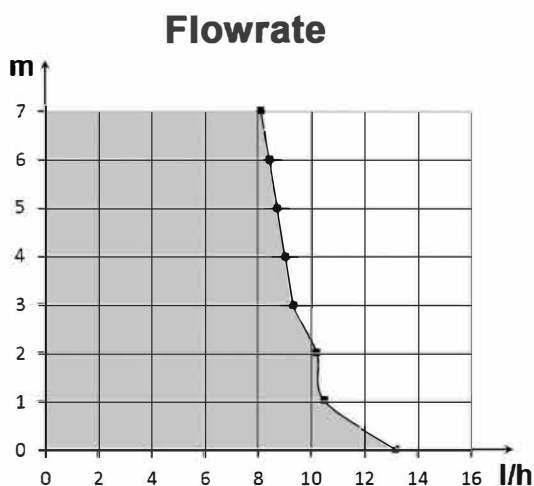

Authorized Distributor  
APL ASIA CO., LTD.  
11/129-132 Moo.5 Lamlukka Rd., T.Kookut, A.Lamlukka, Pathumthani 12130  
Thailand. TEL. 0-2995-4461-3, FAX. 0-2995-4464  
www.apl-asia.com  
EMAIL : sales@apl-asia.com  
LINE@ : @APL-ASIA