

# FLOWWATCH TANK+ 1.2 / 2.5

**SICCOM**

Centrifugal tank pump for the removal of condensates from air conditioners, refrigerated displays or gas condensing boilers.

Ref TANK+ 1.2 50Hz: DE12QCC610  
 Ref TANK+ 2.5 50Hz: DE25QCC620  
 Ref TANK+ 2.5 60Hz: DE25QCD140



**PREMIUM**

**NEW**

**pH > 2.5**



## BENEFITS



### High efficiency

Flowrate max: 800 l/h  
 Discharge head max: 5.6 m



### IP24 protection

The pump is protected against water splashes.



### Universal electric plug

Power/alarm cable can be taken off, making easy installation and maintenance.



### Outlet for 6/9 or 9/12 mm tube

Thanks to its connector supplied, the discharge can be made with a 6/9mm or a 9/12mm tube.



### High capacity tank

Thanks to its 2.5 l tank, the FLOWWATCH TANK+ 2.5 reduces the number of pumping cycles and answers to a great deal of applications.



### Compact tank pump

With only 129mm height, the FLOWWATCH TANK+ 1.2 fits easily in any space.




### Reversible tank

Turning the tank allows to fit in any configuration.

## SPECIFICATIONS

	50Hz version	60Hz version
Flowrate max	800 l/h	800 l/h
Discharge head max	5.6 m	6 m
pH tolerated	pH > 2.5	pH > 2.5
Condensates max temp.	60°C	60°C
Electrical power	65W	65W
Voltage	230V 50Hz	230V 60Hz
Alarm	NO-NC	NO-NC
Noise level		
Protection rating	IP24	IP24
Thermal protection	Yes	Yes
Operating cycle*	30%	30%
Cable lenght	1.5 m	1.5 m
Dimensions TANK+ 1.2	280 x 130 x 129 mm	/
Dimensions TANK+ 2.5	280 x 130 x 159 mm	
Certifications	CE, UKCA, EAC	CE

\* The pump is able to run 30% of the time if necessary.

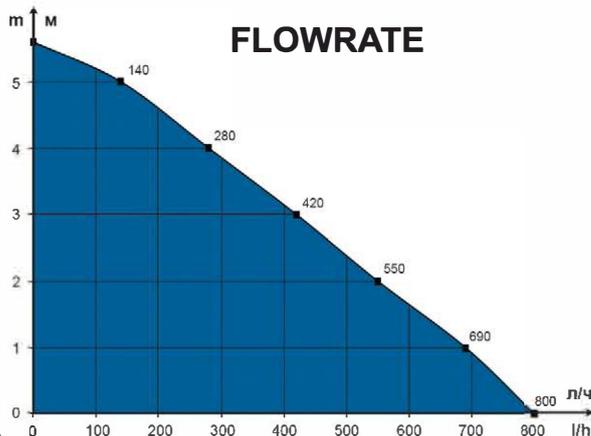

## FLOWRATE



## CONTENTS

Pump - Cable power / alarm - 6/9mm outlet adaptor - Screws and rawplugs - PVC clear tube 6m (only in 60Hz version)

Authorized Distributor

APL ASIA CO., LTD.

11/129-132 Moo.5 Lamlukka Rd.,T.Kookut, A.Lamlukka, Pathumthani 12130 Thailand.

0-2995-4461-3, FAX. 0-2995-4464

www.apl-asia.com EMAIL : sales@apl-asia.com LINE@ : @APL-ASIA

