



Heavy Duty 6 & 10

CONDENSATE REMOVAL PUMP

The Heavy Duty condensate removal pump is designed for high-demand HVAC systems, handling large condensate loads with quiet, reliable operation. Built to withstand the toughest commercial and industrial environments. These pumps are easy to install and combines power, reliability and durability.




HD6: Max. flow 900 l/h
HD10: Max. flow 1070 l/h



HD6: 6m max. rec. head
(flow rate 180L/h)
HD10: 9m max. rec. head
(flow rate 100L/h)



5.2 kg

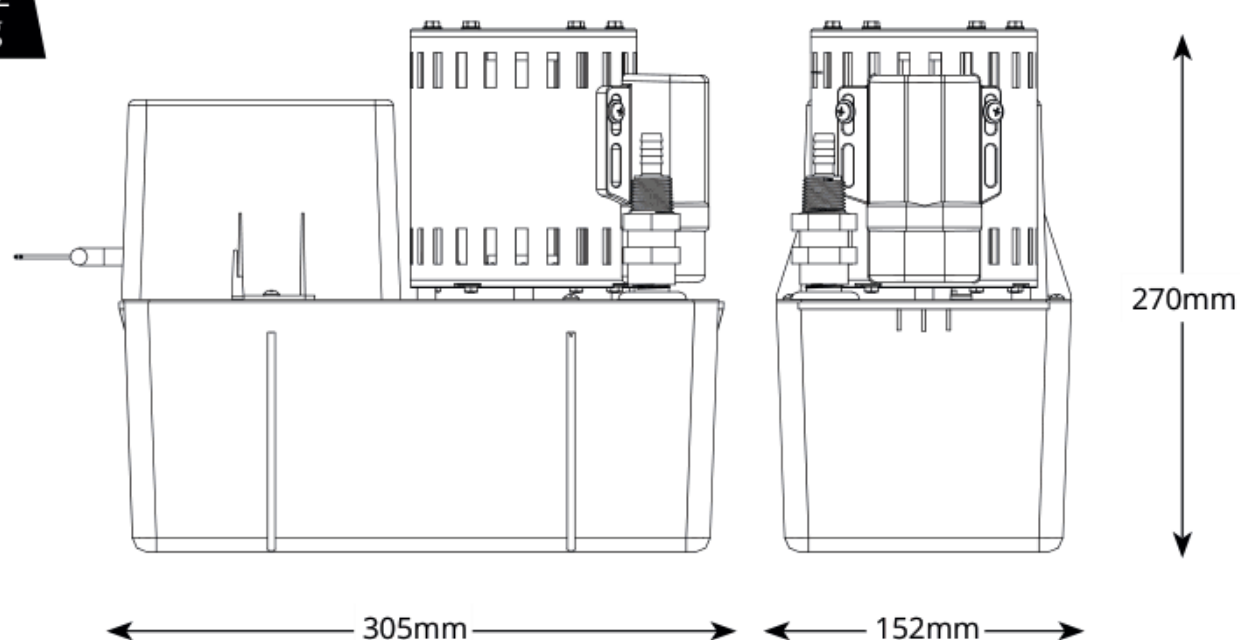

Heavy Duty 6

Heavy Duty 10

Key Features


- High flow rate
- Non return valve
- Easy installation
- 4 litre tank capacity
- High level safety switch

Suitability

- HD6: Up to 1200 kW (4m Btu/h)
HD10: Up to 1460 kW (4.9m Btu/h)
- Dehumidifiers; Air handling units (AHUs)
- **Perfect for...** Large volumes of water

HEAVY DUTY 6 & 10 @ 230 VAC 50Hz

Max. flow	HD6: 900 L/h, HD10: 1070 L/h
Max. rec. head	HD6: 6m, HD10: 9 m
Tank capacity	4L
Sound level@1m	HD6: 64dB(A), HD10: 64dB(A)
Power supply	HD6: 230 VAC, 50Hz, 1.1A HD10: 230 VAC, 50Hz, 1.1A
Rated	HD6: Continuous HD10: Continuous
Class	I Appliance
Max. unit output	HD6: 1200kW (4m Btu/h) HD10: 1460kW (4.9m Btu/h)
Max. ambient temp	40°C (104°F)
Max. water temp	40°C (104°F)
Inlet/Outlet	40mm in, 10mm out
IP Protection	IP20
Safety Switch	5.0A Normally closed

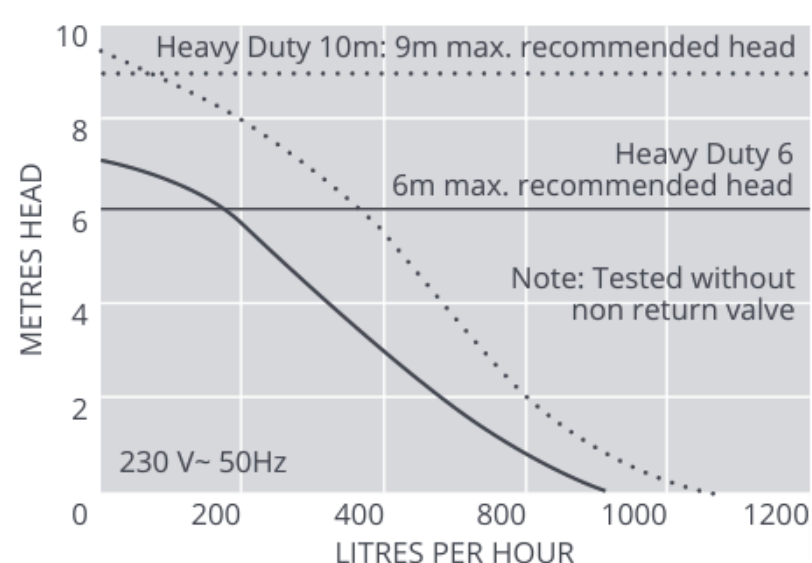

OPTIONS

Heavy Duty 6	FP2074/3
Heavy Duty 10	FP2066/3

SUGGESTED XTRA ACCESSORIES

Description	Part No.
Rubber Adaptors 3/4" (19mm) - 1 1/2" (38mm)	FP2007
Tube to Soil Stack Adaptor	FP2038
Vinyl Tube Braided 3/8" (10 mm)	AX5101



For more installation accessories take a look at our Aspen Xtra range

IN THE BOX

Heavy Duty 6 or 10 pump • Hard wired 2m power cable • Install manual



Download manual at aspenpumps.com

