







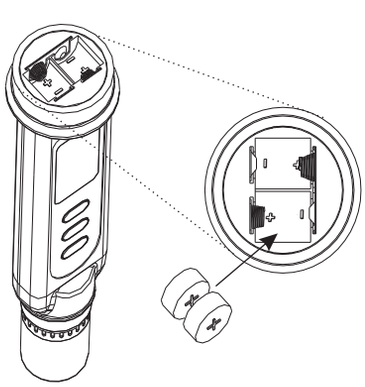

# IP65 pH pen/Low Ionic Strength pH Pen 8684/8685/8686/86851

- ■Big LCD with dual display
- ■pH / Temperature dual display
- ■Measuring stability indicator
- ■One touch auto-calibration up to 3 points
- ■Calibration values are adjustable
- ■Cap to keep sensor wet & last life time
- ■Perfect for well water, surface water, lake water, treated effluent water and boiler feed water (86851 only)




| Model | 8684 | 8685/86851 | 8686 |
|---|---|---|---|
| pH range | 2.0~12.0 | 0.0~14.0 | 0.00~14.00 |
| pH accuracy | +/-0.3 | +/-0.2 | +/-0.05 |
| pH resolution | 0.1 | 0.1 | 0.01 |
| Temp. range | N/A | 0~60.0°C | 0~60.0°C |
| Temp. accuracy | N/A | +/-1°C | +/-0.5°C |
| Temp. resolution | N/A | 0.5 | 0.1 |
| ATC | N/A | ATC | ATC |
| LCD size | 30(H)x18(W)mm | | |
| Operating temp. | 0~50°C | | |
| Operating RH% | Humidity<80% | | |
| Storage temp. | -10~50°C | | |
| Storage RH% | Humidity < 90% | | |
| Sensor life time | >6 months (with good maintenance) | | |
| Dimension | 165(L)x35(W)x32(H)mm | | |
| Weight | 115g | | |
| Battery | LR44 x 4pcs | | |
| Optional | N/A | | |
| Standard Package | Meter/Battery/Manual/Paper box | | |

Install the battery with correct polarity:





**Ordering Code**

**VZ8684AZ, 8684 pH pen**
**VZ8685AZ, 8685 pH pen**
**VZ8686AZ, 8686 pH pen**
**VZ86851AZ, 86851 low ionic strength pH pen**

***Available for EB project**

Authorized Distributor
APL ASIA CO., LTD.
11/129-132 Moo.5 Lamlukka Rd.,T.Kookut, A.Lamlukka, Pathumthani 12130 Thailand.
TEL. 0-2995-4461-3, FAX. 0-2995-4464
www.apl-asia.com
EMAIL : sales@apl-asia.com
LINE@ : @APL-ASIA