
mini FLOWATCH® 2

Mini solenoid pump reliable and silent for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LC4400



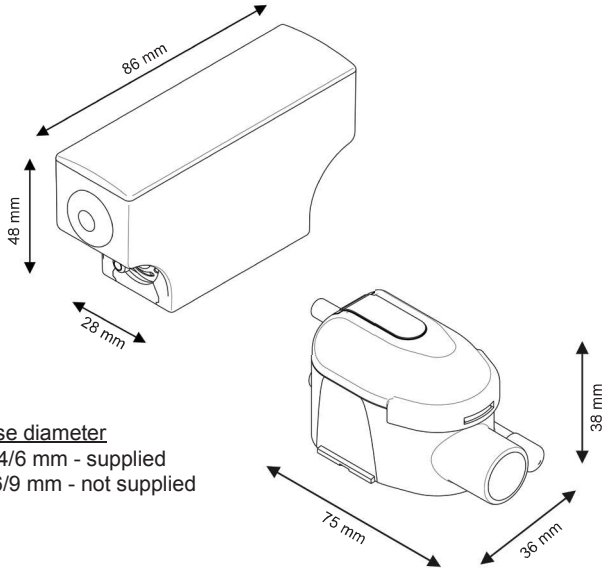


Hose diameter
Suction : 4/6 mm - supplied
Discharge : 6/9 mm - not supplied

SPECIFICATIONS

Flowrate max	**15 l/h**
Suction head max	**2 m**
Discharge head	**10 m**
Electrical power	**19W**
Voltage	**220-240V 50/60Hz**
Alarm	**NO-NC**
Noise level*	
Protection rating	**IP64**
Thermal protection	**Yes**
Operating cycle**	**100%**
Power / alarm cable	**1.6 m**
Dimensions	**86 x 28 x 48 mm / 75 x 38 x 36 mm**

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)
** The pump is able to run 100% of the time if necessary.

FLOWRATE

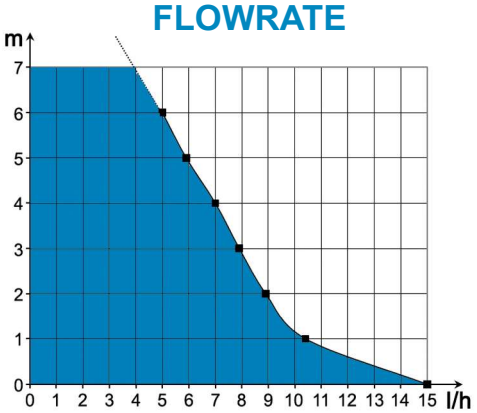

Recommended accessory



Kit Silence
Reduces the noise level
and makes the installation easier.

Ref: GC1KFX2010

BENEFITS



Very silent
Very silent pump (20.2 dBA), suitable for an installation in any room.



IP64 protection
Protected against water splashes and dust.



Quick connectors
Make installation and maintenance easier.



Clear reservoir
Facilitates maintenance thanks to a quick visualization of the reservoir state.



Brass outlet
More solid and reliable than plastic outlet.



Accessories included
All accessories required for installation are included in the box.

CONTENTS



Pump - Reservoir with air-vent tube - Power / alarm cable - Reservoir stand - Double-side adhesive - Inlet tube - Suction tube 1.8m - 1 clamp

Authorized Distributor
APL ASIA CO., LTD.
11/129-132 Moo.5 Lamlukka Rd.,T.Kookut, A.Lamlukka, Pathumthani 12130 Thailand.
TEL. 0-2995-4461-4
www.apl-asia.com
EMAIL : sales@apl-asia.com
LINE@ : @APL-ASIA