
mini FLOWATCH® 1 EVO


Economical mini solenoid pump, with alarm, for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LCD600

NEW



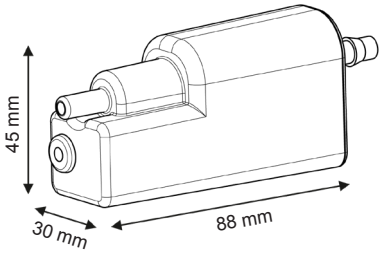






Hose diameter
Suction : 4/6 mm - supplied
Discharge : 6/9 mm - not supplied

SPECIFICATIONS

Flowrate max	**13.2 l/h**
Suction head max	**1.5 m**
Discharge head	**10 m**
Electrical power	**19W**
Voltage	**220-240V 50/60Hz**
Alarm	**NC**
Noise level*	
Protection rating	**IP24**
Thermal protection	**Yes**
Operating cycle**	**100%**
Power / alarm cable	**1.5 m**
Dimensions	**88 x 30 x 45 / 75 x 36 x 38 mm**

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)
** The pump is able to run 100% of the time if necessary.

FLOWRATE

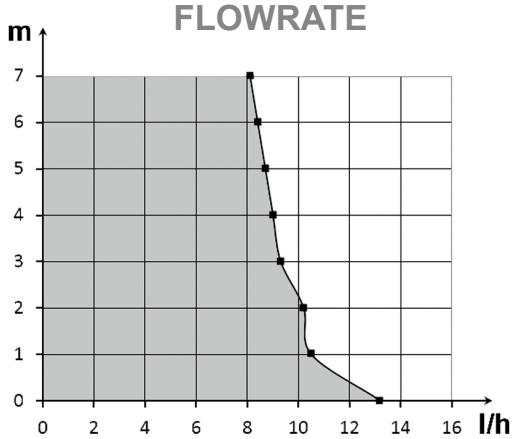

BENEFITS



Quick connectors
Make installation and maintenance easier.



Clear reservoir
Facilitates maintenance thanks to a quick visualization of the reservoir state.



Removable integrated filter
The reservoir has a metal filter that can be easily removed for quick cleaning.



Alarm function
The NC alarm on the mini FLOWATCH® 1 EVO allows to cut off the air conditioner power supply in the event of condensate overflow.

IP24 protection
Protected against water splashes.



Accessories included
Necessary accessories are supplied in the box.



CONTENTS

Pump - Reservoir with air-vent tube - Double-side adhesive - Inlet tube - Suction tube 1.5m - 3 clamps

Authorized Distributor
APL ASIA CO., LTD.
11/129-132 Moo.5 Lamlukka Rd.,T.Kookut, A.Lamlukka, Pathumthani 12130 Thailand.
TEL. 0-2995-4461-4
www.apl-asia.com
EMAIL : sales@apl-asia.com
LINE@ : @APL-ASIA