
mini FLOWATCH® 2 COMFORT


The best mini pump on the market in a quieter and easy-to-install version, for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LCD750

NEW



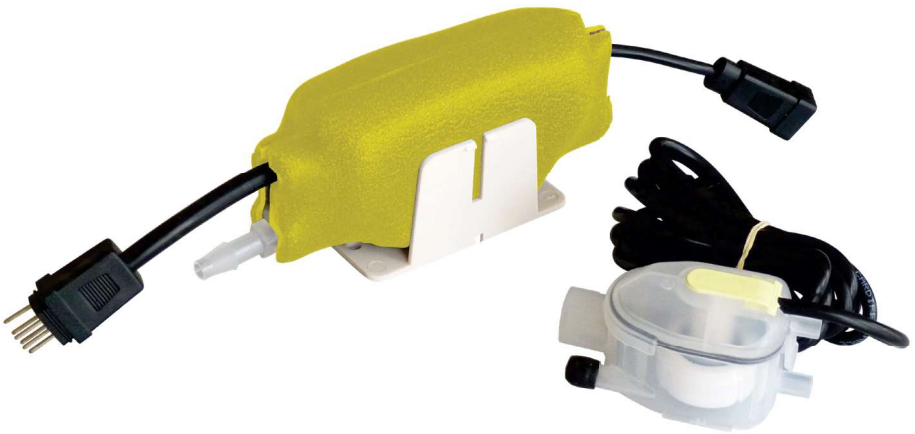

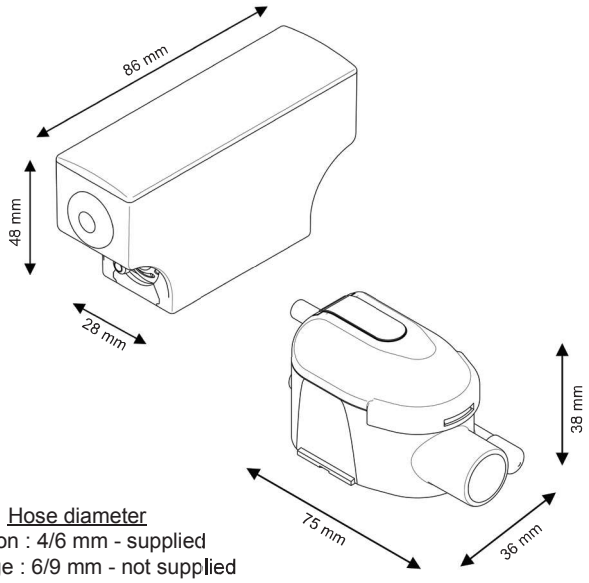


Hose diameter
Suction : 4/6 mm - supplied
Discharge : 6/9 mm - not supplied

SPECIFICATIONS


Flowrate max	**15 l/h**
Suction head max	**2 m**
Discharge head	**10 m**
Electrical power	**19W**
Voltage	**220-240V 50/60Hz**
Alarm	**NO-NC**
Noise level*	
Protection rating	**IP64**
Thermal protection	**Yes**
Operating cycle**	**100%**
Power / alarm cable	**1.6 m**
Dimensions	**86 x 28 x 48 mm / 75 x 38 x 36 mm**

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)
** The pump is able to run 100% of the time if necessary.

FLOWRATE

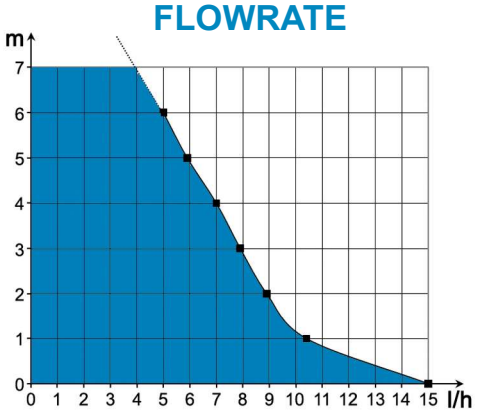


BENEFITS



New casing Comfort

The new Comfort casing is composed of a custom-made patented foam.

It dampens pump vibrations and reduces the perceived noise level.



Reliability proven

The mini FLOWATCH® 2, included, is a reliable and durable pump sold in more than 35 countries.



Very silent

Thanks to its casing, the pump is extremely quiet and suitable for installation in any room.



Pump stand included

Make pump installation and maintenance easier.



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.



Quick connectors

Make installation and maintenance easier.



IP64 protection

Protected against water splashes and dust.



CONTENTS

Pump - Reservoir with air-vent tube - Power / alarm cable - Comfort casing - Pump stand -Reservoir stand -

Authorized Distributor
APL ASIA CO., LTD.
11/129-132 Moo.5 Lamlukka Rd.,T.Kookut, A.Lamlukka, Pathumthani 12130 Thailand.
TEL. 0-2995-4461-4
www.apl-asia.com
EMAIL : sales@apl-asia.com
LINE@ : @APL-ASIA