FLOWATCH® SILENCE DESIGN DT20

The quietest trunking pump in the world!
A complete kit, with a quality trunking and all the accessories needed for installation! For air conditioners up to 20kW / 68000BTU.


Ref:DE20PMCE450

PREMIUM

NEW



16 dBA
certified by LNE

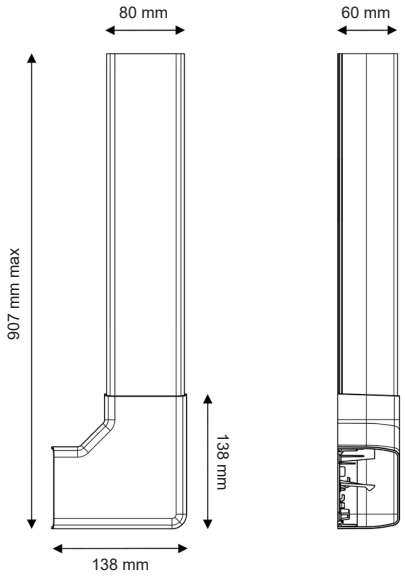


Hose diameter
Suction : 5/7 mm - supplied
Discharge : 6/9 mm - not supplied

SPECIFICATIONS

Flowrate max	**20 l/h**
Suction head max	**3 m**
Discharge head max	**10 m**
Electrical power	**3W**
Voltage	**100-240V 50/60Hz**
Alarm	**NC**
Noise level	
Protection rating	**IP64**
Operating cycle*	**100%**
Power / alarm cable	**1.6 m**
Trunking dimensions	**80 x 60 mm**
Certifications	**CE, UKCA, EAC**

* The pump is able to run 100% of the time if necessary.

FLOWRATE

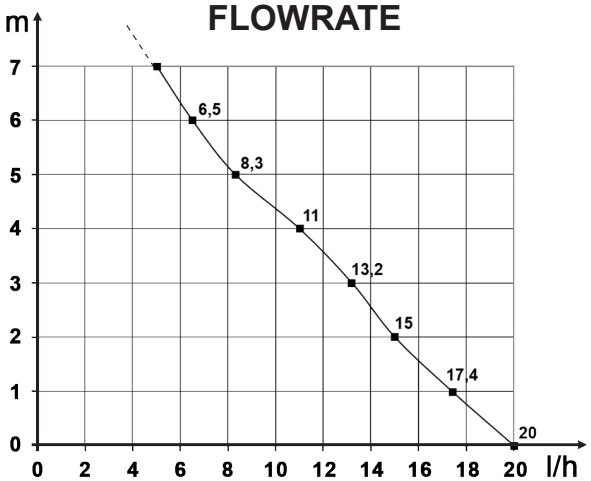

BENEFITS

Extreme silence
The trunking pump
THE MOST SILENT IN THE WORLD !



FLOWATCH® SILENCE DT20 included
Quite simply, the new standard on the market.

DT20 TECHNO

New Technology
Ultra-low power consumption, unrivalled silence, exceptional reliability... Tested and approved!

3W

Very low power consumption
Only 3W power consumption, during operation only!



Custom-made pump casing
For easy installation and perfect integration into the trunking.



New trunking
A market-standard trunking system that's aesthetically pleasing, easy to install and comes with a wide range of accessories.



Stop siphoning included
Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

CONTENTS

Trunking with elbow - Finishing gasket - Finishing ceiling plate - Pump in absorber bracket - Stop Siphoning - Reservoir with air-vent tube - Power / alarm cable - Inlet tube - Suction tube 0.25m - Screws and rawlplugs



Authorized Distributor
APL ASIA CO., LTD.
11/129-132 Moo.5 Lamlukka Rd.,T.Kookut, A.Lamlukka, Pathumthani 12130 Thailand.
TEL. 0-2995-4461-4
www.apl-asia.com EMAIL : sales@apl-asia.com LINE@ : @APL-ASIA