RVG-10A

Compatible with high and low pressure measurements

High pressure mode: Measure condensation temperature and Sub-cooling

Low pressure mode: Measure evaporation temperature and Super-heating

Waterproof

The instrument is protected to IP65 against low-pressure water jets

Note: Cannot be immersed directly in water

Ball valve

The ball valve has a short opening and closing time and allows for precise control of the **charge volume**

Rich measurement functions


Four Measurement Functions: Pressure Measurement, Temperature Measurement, Leak Test, AC ECG

Exhaust valve

Pressure venting simplifies venting for greater convenience and safety

Specifications

Item No.	RVG-10A
Pressure Range	-14.5~800 psi
Accuracy	±0.5%FS
Resolution	0.5 psi
Temperature range	-50℃ ~ 150℃ / -58℉ ~ 302℉
Temperature Accuracy	±0.5℃ / ±0.9℉
Temperature Resolution	0.1℃ / 0.2℉
Pressure units	kPa, MPa, bar, psi, kg/cm²
Temperature units	℃, ℉
Operating temperature and humidity	-10~50℃, 35%~85% RH
Battery	2# AAA
Refrigerant	88 types

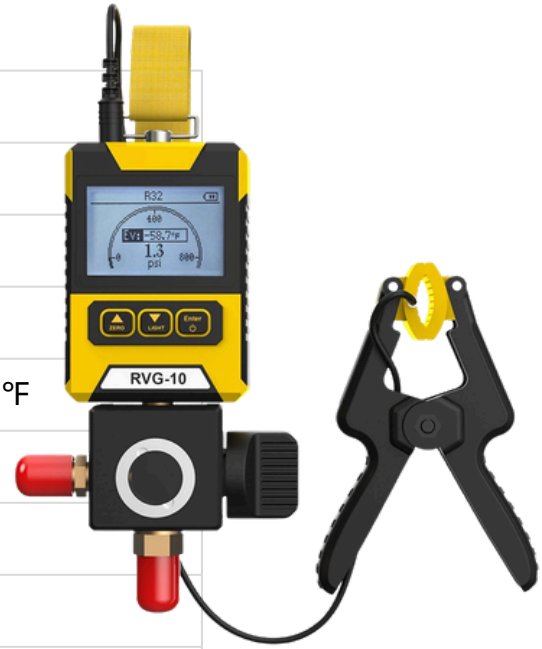

รับประกันตัวเครื่อง 1 ปี

APL-ASIA

บริษัท เอพีแอล เอเซีย จำกัด
WWW.APL-ASIA.COM
Tel 02-9954461-4 Email: sales@apl-asia.com Line: @APL-ASIA
11/129-132 หมู่ 5 ถนน ลำลูกกา 5 ตำบลคูคต อำเภอลำลูกกา ปทุมธานี 12130

SCAN HERE
LINE