EN



Mini Aqua®

CONDENSATE REMOVAL PUMP

The world's slimmest condensate removal pump is designed to fit where other's can't!



- 12L/h max. flow
- 10m max. rec. head (flow rate 6L/h)
- 21dB(A) @ 1m

KEY FEATURES


- Ultra slim
- High performance
- Plug & play
- Anti siphon device


SUITABILITY

- Up to 16kW / 54,000Btu/h
- High wall mini split systems; Ducted units; Floor standing & Chassis units

✓**Perfect for...** Installing directly inside the unit

0.18 kg†

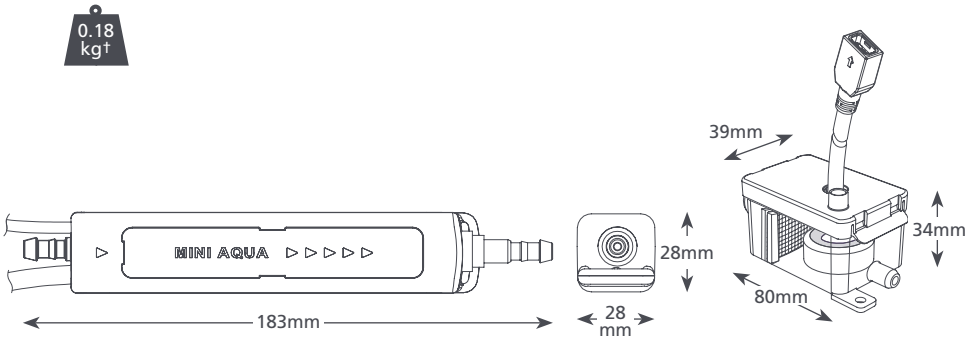

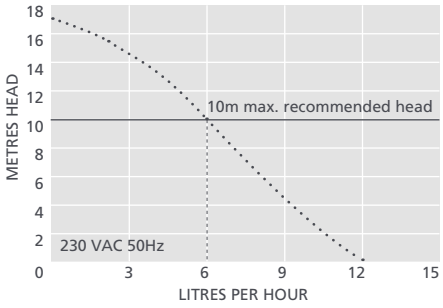

MINI AQUA @ 230 VAC 50Hz	
Max. flow	12L/h @ 0m head
Max. rec. head	10m
Max. suction lift	2m
dB(A) @ 1m	21
Power supply	230 VAC, 0.1A, 16W, 50/60Hz
Rated	Non continuous
Class	II appliance ⧈
Max. unit output	16kW / 54,000Btu/h
Max. water temp	40°C / 104°F
Discharge tube	6mm ID
IP Protection	IP24
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	✓

Information correct at time of going to press.

MINI AQUA OPTIONS	
Mini Aqua (Europe)	FP2406/2

† Pump only

IN THE BOX

Mini Aqua pump • 1.5m Plug & play power cable • Reservoir (inc. filter, float, lid) • 150mm Vinyl breather tube 6mm ID • Anti siphon device • 1.5m Suction tube 6mm ID • 220mm Blue inlet hose 14mm ID • Drain connector kit • Fixing kit • Install manual

Download manual at aspenpumps.com

View install video at aspenpumps.com

SUGGESTED XTRA ACCESSORIES

Description		Part No.
1 Amp Fuse		FP2620
Tube To Soil Stack Adaptor		FP2038
Vinyl Tube Braided 1/4" (6mm)		AX5100
Inline Filter 16mm		FP2640

For more installation accessories take a look at our Aspen Xtra range