







PORTABLE 4 GAS DETECTOR

The AGH6200 detector is a standard four-in-one gas detection alarm. The product can simultaneously detect the concentration of Ex,O2,H2S,CO. Automatic sound, light and vibration alarms.

The AGH6200F is a special designed flammable gas detector with CCCF certification, and can cope with the harsh environment of -40 ° C to 70 ° C.

Features


- Standard four gas with Ex,O2,H2S,CO is suitable for most gas detection applications.
- CCCF certification, suitable to -40°C ~ 70°C (AGH6200F only).
- Sound, light, vibration alarm method, effective warning.
- The TPU+PC housing, more wear-resistant.
- Ingressive protection in IP66 rating, dustproof and waterproof.
- Compatible with a sampling pump for confined space usage.

Specifications

Description	Specifications	AGH6200	AGH6200F
Function			
gas detected	Ex	●	●
	O2, CO, H2S	●	-
measure range	see QUICK-SELECTION-TABLE	●	●
response time*	T90≤60S	●	●
accuracy*	≤±5%F.S	●	●
repeatability*	≤2%F.S	●	●
sampling method	diffusion	●	●
Electric			
battery	rechargeable lithium battery,3.7V,2200mAh	●	●
continuous operation	at least 18 hours after a typical 4 hours full charge	●	●
Alarm			
alarm method	sound,LED light,vibration	●	●
sound intensity	＞90dB	●	●
Display and Operation			
display	LCD	●	●
button	2 (POWER, MENU)	●	●
Environment			
ingress protection	IP66	●	●
operating temperature*	-20℃～60℃	●	-
	-40℃～70℃	-	●
operating humidity	10～95%RH non-condensing	●	●
operating pressure	80-120kPa	●	●
Structure			
body material	antistatic PC+TPU	●	●
weight	about 0.28kg	●	●
dimensions	132*63*48mm(H*W*D)	●	●
Certificates			
CPA	2018CA0047-32	●	-
	2018CA0046-32	-	●
EX	Exdib Ⅱ CT4 Gb	●	●
CCCF	073194850102ROM	-	●

Note:* refers to there's some difference vary from different gas, please contact the manufacturer for detail

Dimensions

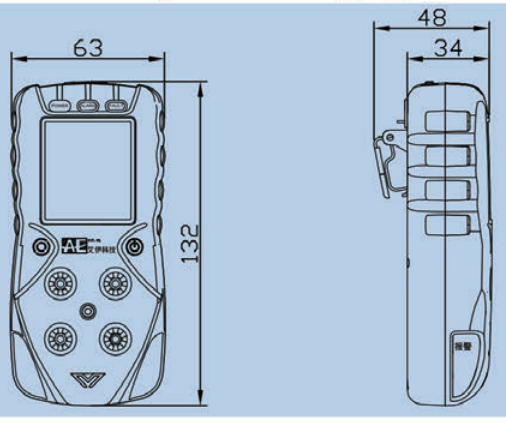



PORTABLE GAS DETECTOR

In the daily production of petrochemical engineering, steel, and chemical engineering industries, workers often encounter with flammable and toxic gases of various sorts, and accidents are easy to take place without proper safety protection. As a kind of personal safety protection instrument, portable gas detector plays an important role in industrial production safety.

The portable gas detector is small in size and easy to carry. It can be used for workshop routing inspection for side leakage, as well as in confined spaces such as flame operation inspection.



difussion type gas detector




build-in pump gas detector



external pump gas detector

SELECTION GUIDE

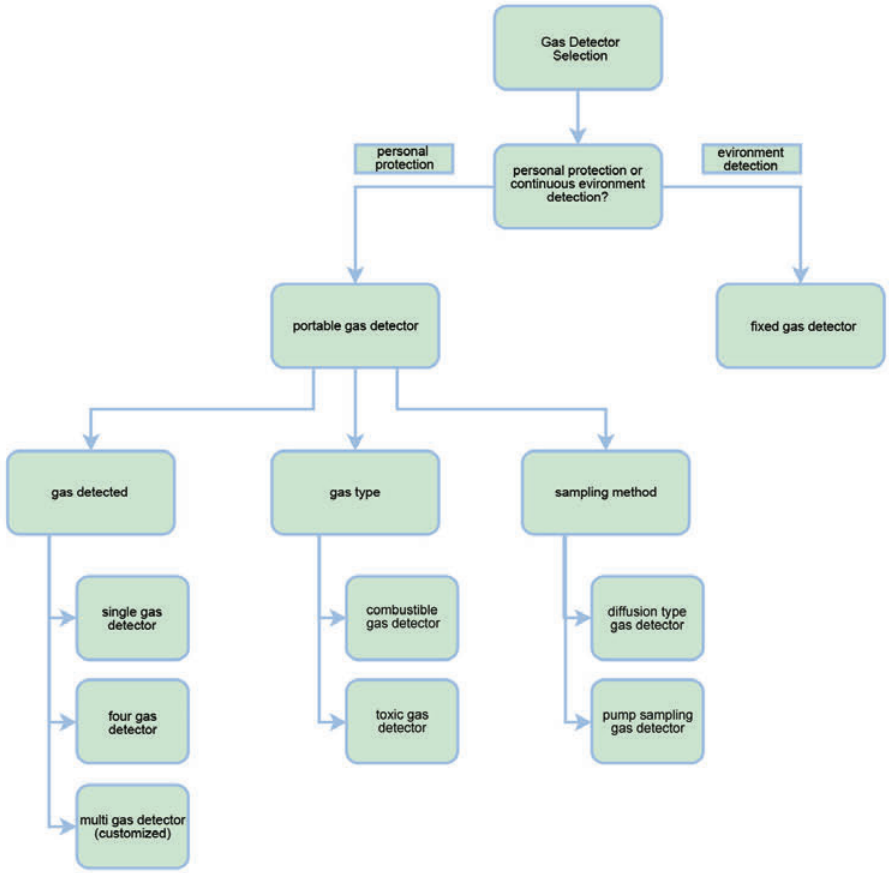

QUICK SELECTION TABLE 4 -- PORTABLE GAS DETECTOR

Description	AGH5100	AGH6100	AGH6100F	AGH6200	AGH6200F	AGH8100
The number of sensors						
1	●	-	●	-	●	●
4 in 1	-	-	-	●	-	-
1~4, optional	-	●	-	-	-	-
Gas detected						
combustible gas-catalytic	-	●	●	●	●	●
toxic gas-electrochemical	●	●	-	●	-	-
toxic gas-PID	-	●	-	-	-	-
toxic gas-infrared	-	●	-	-	-	-
Sampling method						
diffusion	●	●	●	●	●	-
built-in pump	-	-	-	-	-	●
Certificates						
CPA	●	●	●	●	●	●
EX	●	●	●	●	●	●
ATEX	-	●	●	-	-	-
CCCF	-	-	-	-	●	-

QUICK SELECTION TABLE 5 -- GAS DETECTED

Gas		Measure Range	Principle	Resolution	AGH5100	AGH6100	AGH6100F	AGH6200	AGH6200F	AGH8100
Combustible gas	EX	0-100%LEL	Combustion catalytic	1%LEL	-	●	●	●	●	-
Methane	CH_4	0-10000μmol/mol	Combustion catalytic	1μmol/mol	-	-	-	-	-	●
Oxygen	O_2	0-30%VOL 0-25%VOL	Electrochemical	0.1%VOL	●	●	-	●	-	-
Carbon monoxide	CO	0-1000μmol/mol	Electrochemical	1μmol/mol	●	●	-	●	-	-
Hydrogen sulphide	H_2S	0-100μmol/mol	Electrochemical	1μmol/mol	●	●	-	●	-	-
Chlorine	CL_2	0-10μmol/mol	Electrochemical	0.1μmol/mol	●	●	-	-	-	-
Sulphur dioxide	SO_2	0-20μmol/mol	Electrochemical	0.1μmol/mol	●	●	-	-	-	-
Ammonia	NH_3	0-100μmol/mol	Electrochemical	1μmol/mol	●	●	-	-	-	-
Nitric oxide	NO	0-250μmol/mol	Electrochemical	1μmol/mol	●	●	-	-	-	-
Nitrogen dioxide	NO_2	0-20μmol/mol	Electrochemical	0.1μmol/mol	●	●	-	-	-	-
Hydrogen chloride	HCL	0-30μmol/mol	Electrochemical	0.1μmol/mol	●	●	-	-	-	-
Ozone	O_3	0-1μmol/mol	Electrochemical	0.01μmol/mol	●	●	-	-	-	-
Ethylene oxide	C_2H_4O	0-20μmol/mol	Electrochemical	0.1μmol/mol	●	●	-	-	-	-
Formaldehyde	CH_2O	0-20μmol/mol	Electrochemical	0.1μmol/mol	●	●	-	-	-	-
Methanol	CH_3OH	0-20μmol/mol	Electrochemical	0.1μmol/mol	●	●	-	-	-	-
Phosphine	PH_3	0-5μmol/mol	Electrochemical	0.1μmol/mol	●	●	-	-	-	-
Hydrogen	H_2	0-1000μmol/mol	Electrochemical	1μmol/mol	●	●	-	-	-	-
Fluorine	F_2	0-1μmol/mol	Electrochemical	0.01μmol/mol	●	●	-	-	-	-
Hydrogen fluoride	HF	0-10μmol/mol	Electrochemical	0.1μmol/mol	●	●	-	-	-	-
Hydrogen cyanide	HCN	0-50μmol/mol	Electrochemical	0.1μmol/mol	●	●	-	-	-	-
Phosgene	$COCL_2$	0-1μmol/mol	Electrochemical	0.01μmol/mol	●	●	-	-	-	-
Arsenic hydride	AsH_3	0-1/20μmol/mol	Electrochemical	0.01μmol/mol	●	●	-	-	-	-
Silane	SiH_4	0-50μmol/mol	Electrochemical	0.1μmol/mol	●	●	-	-	-	-
Acrylonitrile	C_3H_3N	0-20μmol/mol	Electrochemical	0.1μmol/mol	●	●	-	-	-	-
Carbon disulfide	CS_2	0-20μmol/mol	Electrochemical	0.1μmol/mol	●	●	-	-	-	-
Ethanol	C_2H_5OH	0-20μmol/mol	Electrochemical	0.1μmol/mol	●	●	-	-	-	-
Methane	CH_4	0-5%/100%VOL	Infrared	0.1%VOL	-	●	-	-	-	-
Carbon dioxide	CO_2	0-5%/100%VOL	Infrared	0.1%VOL	-	●	-	-	-	-
Toluene	C_7H_8	0-20μmol/mol	PID	0.1μmol/mol	-	●	-	-	-	-
Xylene	C_8H_{10}	0-20μmol/mol	PID	0.1μmol/mol	-	●	-	-	-	-
Benzene	C_6H_6	0-20μmol/mol	PID	0.1μmol/mol	-	●	-	-	-	-
Acetic acid	$C_2H_4O_2$	0-1000μmol/mol	PID	1μmol/mol	-	●	-	-	-	-
Volatile organic compounds	VOC	0-20μmol/mol 0-1000μmol/mol	PID	0.1μmol/mol 1μmol/mol	-	●	-	-	-	-

Note: 1, Any gas that not mentioned above, just contact AIYI Technologies for further information; 2, 1μmol/mol=1ppm

BUSINESS CARD

Nanjing AIYI Technologies Co., Ltd.

Address: Building 13, No. 1318 Qingshuiting East Road, Jiangning District,
Nanjing City 210000, Jiangsu Province, China
Tel：+86 25 87756351
Fax：+86 25 87787362
Website：www.aeindustry.com www.autequ.com
E-mail：sales@autequ.com

Disclaimer: All images in this document, configuration, technical parameters are for reference only;
The specific configuration and parameters are subject to the factory documents.

APL ASIA CO., LTD. Authorized Distributor
Address: 11/129-132 Moo.5 Lamlukka Rd.,
T.Kookut, A.Lamlukka, Pathumthani 12130 Thailand.
TEL: 0-2995-4461-4
Website: www.apl-asia.com
EMAIL: sales@apl-asia.com
LINE@: @APL-ASIA