



AIR CONDITIONING



REFRIGERATION



HEATING



# Low Profile ERRP

## CONDENSATE REMOVAL PUMP

Designed exclusively to fit underneath retail refrigeration cabinets the lightweight plastic ERRP (Economical Retail Refrigeration Pump) allows for the removal of defrost and contaminated water.



190L/h max. flow




21m max. rec. head (flow rate 10L/h)

### KEY FEATURES

- Lightweight & slim
- Easy to clean and carry
- Filter to catch debris
- Plug & play


### SUITABILITY

- Refrigeration units; cold store cabinets
- ✓ **Perfect for...** Single & multiple refrigeration units

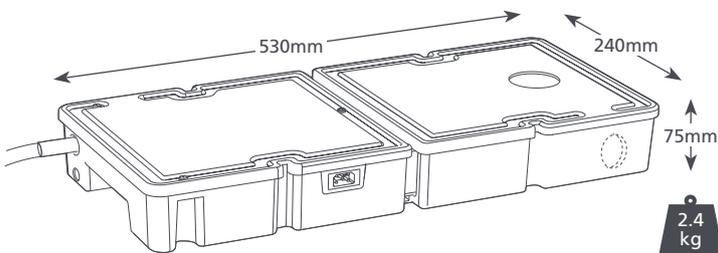

### LOW PROFILE ERRP @ 230 VAC 50Hz

Max. flow	190L/h @ 0m head
Max. rec. head	21m
Tank capacity	3.5L
dB(A) @ 1m	60
Power supply	230 VAC, 0.2A, 50/60Hz
Rated	Non continuous
Class	I appliance
Max. unit output	n/a
Max. water temp	40°C / 104°F
Inlet/outlet	50mm in, 10mm out
IP Protection	IP24
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	n/a
Self priming	n/a

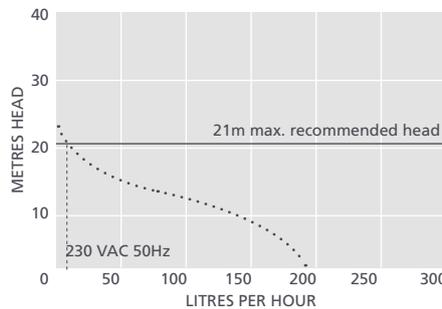

### SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 3/8" (10mm)	AX5101

**Xtra** For more installation accessories take a look at our Aspen Xtra range

### LOW PROFILE ERRP OPTIONS

Low Profile ERRP – top inlet	FP2597
Low Profile ERRP – side inlet	FP2805

\* Side inlet only

### IN THE BOX

Low Profile ERRP pump • 2m Plug & play power cable • 1 1/2" BSP connector (for 40mm ID waste pipe) • Install manual

Download manual at [aspenpumps.com](http://aspenpumps.com)

Information correct at time of going to press.



[aspenpumps.com](http://aspenpumps.com)

+44 (0)1323 848842

[sales@aspenpumps.com](mailto:sales@aspenpumps.com)

reliable | silent | simple