



AIR CONDITIONING



REFRIGERATION



HEATING



EN

# Hot Water Heavy Duty

## CONDENSATE REMOVAL PUMP

The Hot Water Heavy Duty pump is designed to handle 80°C water and with an outstanding 1800L/h water flow rate. No job is too big!



1800L/h max. flow




15m max. rec. head (flow rate 10L/h)

### KEY FEATURES


- High flow rate
- Handles 80°C water
- Non return valve
- Easy installation

### SUITABILITY

- Up to 2400kW / 8m Btu/h
- Air handling units (AHUs); Humidifiers, Boilers; Refrigeration
- ✓ **Perfect for...** Large volumes of hot water

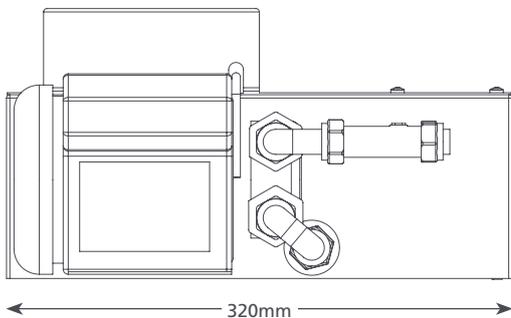

320mm

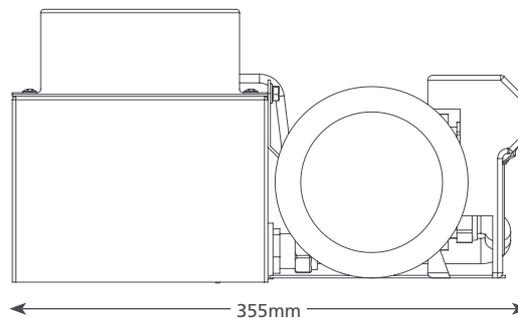


355mm

160mm

7 kg

### HOT WATER HEAVY DUTY @ 230 VAC 50Hz

Max. flow	1800L/h @ 0m head
Max. rec. head	15m
Tank capacity	5L
dB(A) @ 1m	63
Power supply	230 VAC, 1.5A, 50/60Hz
Rated Class	Continuously I appliance
Max. unit output	2400kW / 8m Btu/h
Max. water temp	80°C / 176°F
Inlet/outlet size	x2 40mm in, 15mm out
IP Protection	IP21
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	n/a
Self priming	n/a

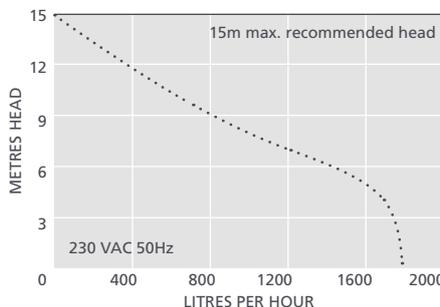

### SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Pipe to Pipe adaptor 21mm-40mm	FP2018

**Xtra** For more installation accessories take a look at our Aspen Xtra range

### HOT WATER HEAVY DUTY OPTIONS

Hot Water Heavy Duty FP2132

### IN THE BOX

Hot Water Heavy Duty pump (including non-return valve) • 2m power cable • Install manual

Download manual at [aspenpumps.com](http://aspenpumps.com)

Information correct at time of going to press.



[aspenpumps.com](http://aspenpumps.com)

+44 (0)1323 848842

[sales@aspenpumps.com](mailto:sales@aspenpumps.com)

reliable | silent | simple