

# Methane Detector-Transmitter E2611-CH4




## Features

- Accurate and stable measurement
- Compact housing providing optimal airflow
- Two analog outputs settable to 4-20 mA or 0-10 V
- Two relays for alarm / ventilation control
- Acoustic alarm
- RS485 Modbus RTU digital interface


## Specifications

Calibration	Methane
Sensor type	Metal oxide semiconductor
Sampling method	Diffusion
Typical detection range	0...100%LEL
Resolution/digital unit	0,1 %LEL
Response time	> 60 s
Signal update	Every 1 second
Sensor lifetime	> 5 years
Maintenance interval	12 months
Self-diagnostics	Full functionality check at start-up
Warm-up time	≤ 1 min
Power supply	12...36 VDC (default) 24 VAC or 230 VAC as options
Power consumption	< 2 VA
Digital interface	RS485, Modbus RTU protocol
Output relays	2 × SPST relays (closing contact), 250 VAC / 30 VDC, 5 A max
Default alarm set-points	LOW set 20, release 16% LEL HIGH set 50, release 40%LEL
Alarms	Buzzer 85 dB
Analog outputs	2 × 4-20 mA / 0-10 V, user settable
Enclosure	ABS plastic with ventilation slots, wall mount, protection class IP20
Dimensions	H85 × W85 × D37 mm
Operating conditions	-40...+70 °C, <95 %RH, without condensation Normal ambient O2 concentration Non-ATEX areas No corrosive gases or silicon containing volatile products in the atmosphere


## Dimensions

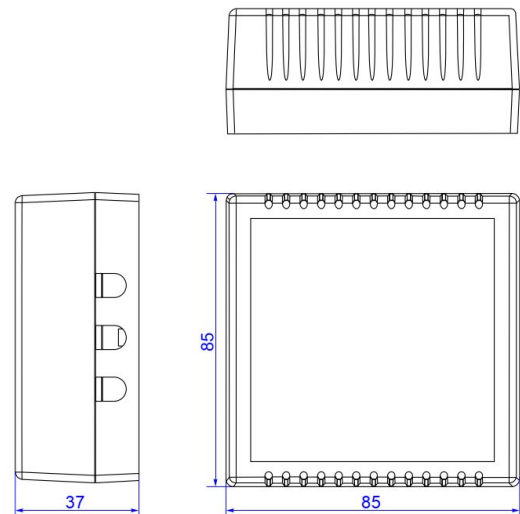

## Connection diagrams

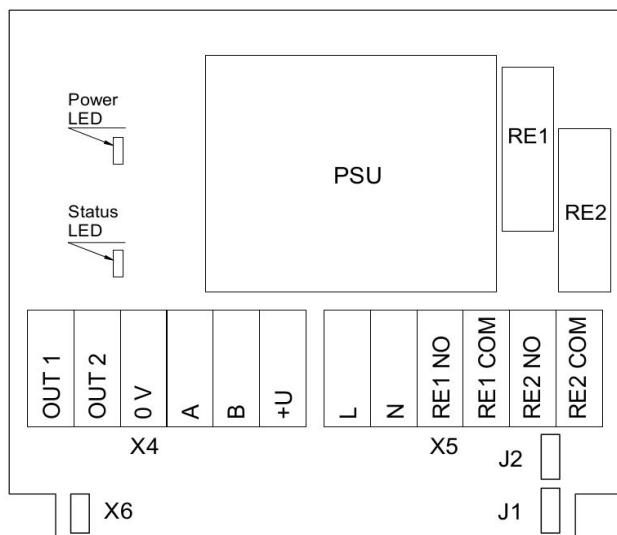

Version with PSU

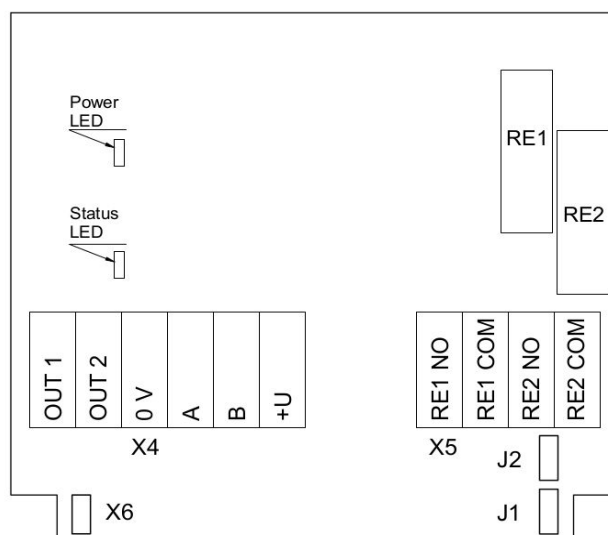

Version without PSU

### Jumpers

**J1** OUT1 type (open: 4-20 mA; closed 0-10 V)  
**J2** OUT2 type (open: 4-20 mA; closed 0-10 V)  
**X6** Reset Modbus network parameters to default

### X4 terminals

**OUT1** 4-20 mA / 0-10 V output  
**OUT2** 4-20 mA / 0-10 V output  
**0V** 0 V / 24 VAC Neutral (optional)  
**A** RS485 A / Data +  
**B** RS485 B / Data -  
**+U** +24 VDC / 24 VAC Phase (optional)

### X5 terminals (optional)

**L** 90...265 VAC Phase  
**N** 90...265 VAC Neutral  
**RE1 NO** Relay 1, normally open terminal  
**RE1 COM** Relay 1, common terminal  
**RE2 NO** Relay 2, normally open terminal  
**RE2 COM** Relay 2, common terminal

