

Flameproof Carbon Dioxide Detector-Transmitter E2658-CO2



Features

- Wall mount robust flameproof metal enclosure
- Suitable for ATEX Zones 2 and 22
- Two analog outputs settable to 4-20 mA or 0-10 V
- RS485 Modbus RTU digital interface
- Relay option

Specifications

Calibration	Carbon dioxide CO ₂
Sensor type	Photoacoustic
Sampling method	Diffusion
Typical detection range	0...10 000 ppm (ordering code 10K) 0...40 000 ppm (ordering code 40K) Up to 100% CO ₂ on request
Resolution / digital unit	1 ppm for 10K range 10 ppm for 40K range
Response time T60	≤ 60 s
Signal update	Every 5 seconds
Maintenance interval	No field recalibration if ABC algorithm is enabled for 10K/40K
Sensor lifetime	~ 10 years
Self-diagnostics	Full functionality check at start-up
Warm-up time	≤ 1 min
Power supply	12...36 VDC (default), 24 VAC or 230 VAC as options
Power consumption	< 2 VA
Digital interface	RS485, Modbus RTU protocol
Analog outputs	2 × 4-20 mA / 0-10 V, user settable
Output scale width	Recommended: 20-100% of the range; > 10 × resolution in any case
Enclosure	Grey die-cast aluminium, protection class IP66
Dimensions	H80 × W125 × D57 / H80 × W175 × D80 mm
Operating environment	Industrial indoor and outdoor locations
Operating conditions	-40...+60 °C, 0...100 %RH; 0,9...1,1 atm; Safe areas and ATEX Zones 2 and 22 Non-aggressive atmosphere
Relay option (ordering code R)	
Output relays	2 × SPST relays (closing contact), 250 VAC / 30 VDC, 5 A max
Default alarm setpoints	Determined by user within 5-95% of the range
Other options	
Ambient pressure compensation	In the range 0,5...2 bar of absolute pressure

Approvals

Enclosure:

ATEX / IECEx
DEMKO 13 ATEX 1327771U
Ex II 2 G Ex e IIC Gb
Ex II 2 D Ex tb IIIC Db IP66

Glands:



ATEX / IECEx
EESF 19 ATEX 023X
Ex II 2G Ex db IIC Gb
Ex II 2D Ex tb IIIC Db IP66

CE conformity


Flameproof to IEC EN 60079-1
Increased safety to IEC EN 60079-7
EMC Emissions to EN 61000-6-3, EN 61326-1
EMC Immunity to EN 61000-6-1, EN 61000-6-2




Dimensions

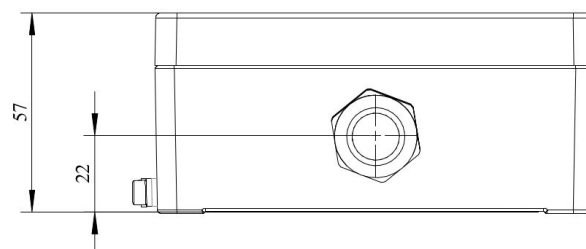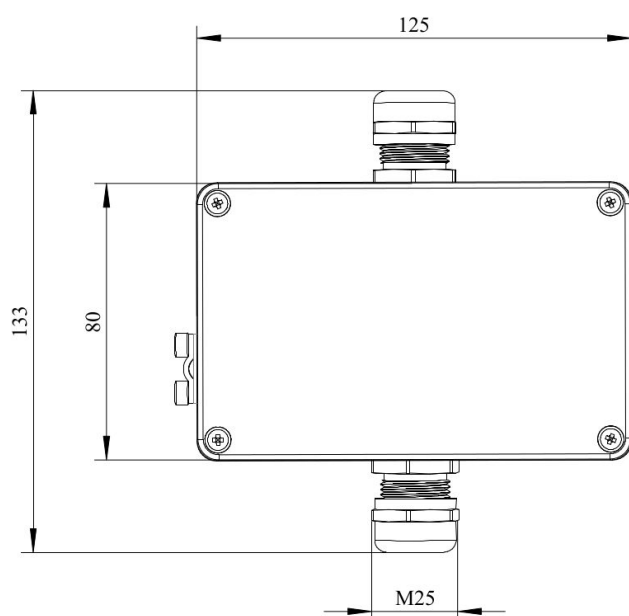


Connection diagrams

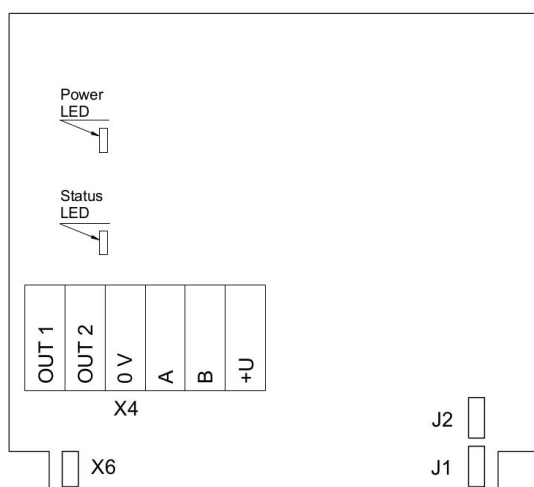


Version without PSU and relays

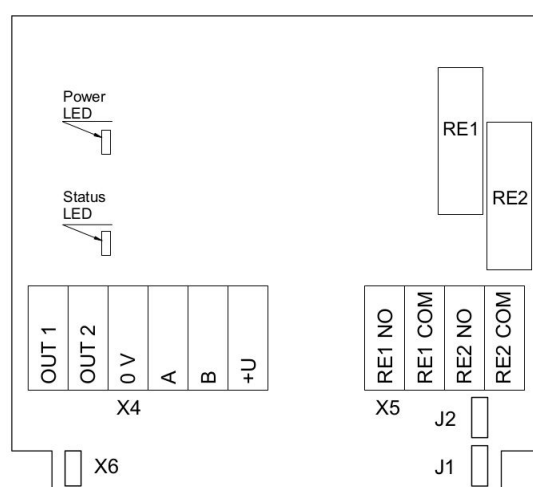

Version without PSU and with relays

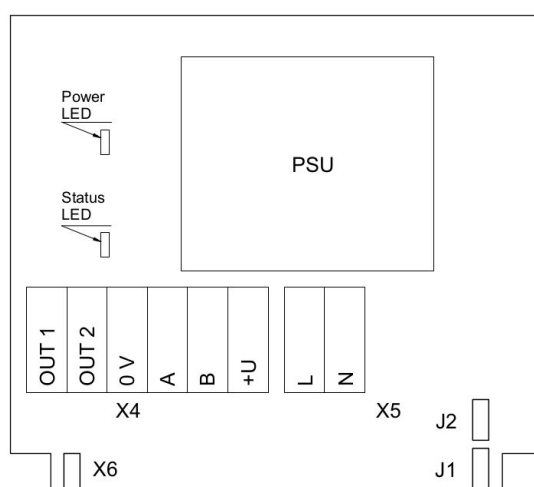

Version with PSU and without relays

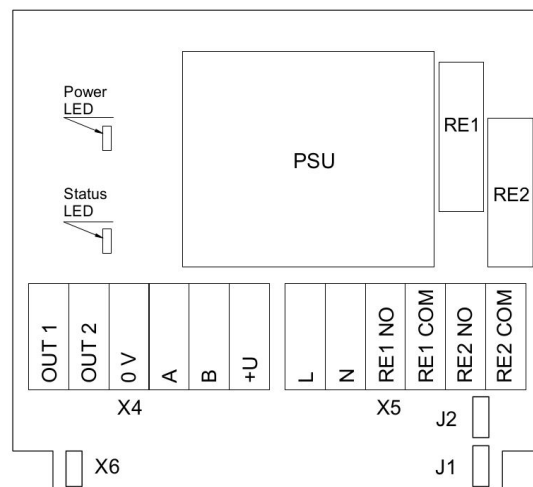

Version with PSU and relays



Jumpers

J1	OUT1 type (open: 4-20 mA; closed 0-10 V)
J2	OUT2 type (open: 4-20 mA; closed 0-10 V)
X6	Reset Modbus network parameters to default

X4 terminals

OUT1	4-20 mA / 0-10 V output
OUT2	4-20 mA / 0-10 V output
0V	0 V / 24 VAC Neutral (optional)
A	RS485 A / Data +
B	RS485 B / Data -
+U	+24 VDC / 24 VAC Phase (optional)

X5 terminals (optional)

L	90...265 VAC Phase
N	90...265 VAC Neutral
RE1 NO	Relay 1, normally open terminal
RE1 COM	Relay 1, common terminal
RE2 NO	Relay 2, normally open terminal
RE2 COM	Relay 2, common terminal

