CO FLOWATC



Mini solenoid pump simple and economic for the condensate removal of air conditioners up to 10kW / 36000BTU.


Ref: DE05LCC190









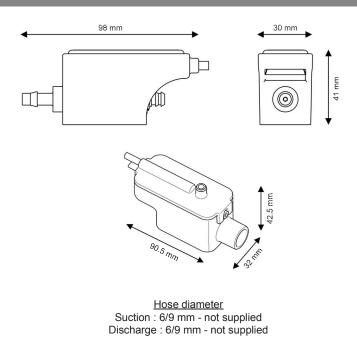

SPECIFICATIONS

Flowrate max	13.2 l/h
Suction head max	1.5 m
Discharge head	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm*	No alarm
Noise level**	())))
Protection rating	IP20
Thermal protection	Yes
Operating cycle***	100%
Power cable	1.5 m
Dimensions	98 x 30 x 41 mm / 90 x 32 x 42 mm

- * Alarm option available on request.
- ** Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)
- *** The pump is able to run 100% of the time if necessary.

FLOWRATE m 7 6 5 4 3 2 1 16 I/h 14 10

BENEFITS



Removable reservoir

Can be easily unclipped in order to clean the reservoir and the float.



Integrated filter

Plastic filter integrated to the reservoir. It prevents big impurities to damage the pump.



Accessories included

All necessary accessories are included in the box.



Compact pump

Very small, pump and reservoir are easy to install.



CONTENTS

Pump - Reservoir - Double-side adhesive for reservoir fixing - Inlet tube - 3 clamps

14