

## PERFORMANCE

MAX FLOW	MAX HEAD
50 L/ HOUR	20 METRES

The ArctikBlue® is designed to collect, filter and pump condensate water from refrigeration units during daily operation and defrost cycles. The rotary diaphragm pump provides a quiet, reliable and self priming operation.




WATER TANK CAP.	PUMP ON/ OFF	ALARM ON VOL.
4.1 LITRES	330 ML	3600 ML



**DURABLE  
DESIGN**

Drawn from a single piece of thick-gauge stainless-steel, the ARCTIKBLUE® can withstand far rougher treatment than any other cabinet/dairy pumps on the market.



**LOW  
PROFILE**


The ARCTIKBLUE® has been specially designed to fit under low profile cabinets where space is at a premium, reducing the need to bore the trays into the ground.




**DRY DRAIN  
CHANNEL**

The new and improved condensate channelling designed to direct every drop of condensate to the inlet of the pump, completely vacating the tray of liquid.

## DIMENSIONS (MM)

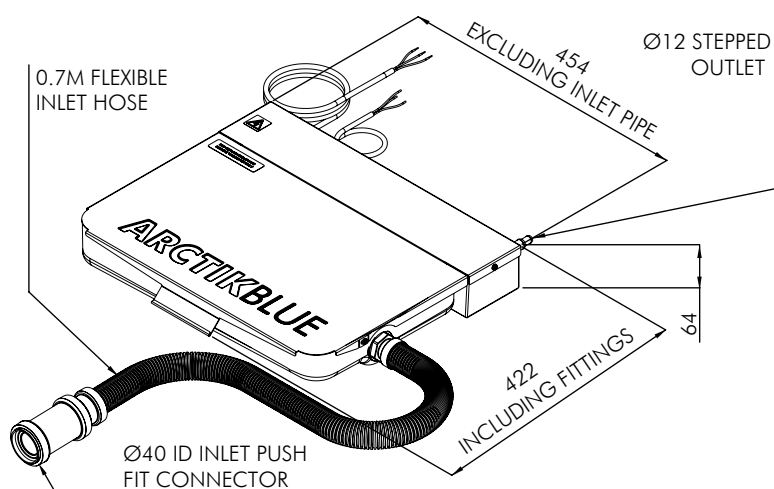

## PERFORMANCE

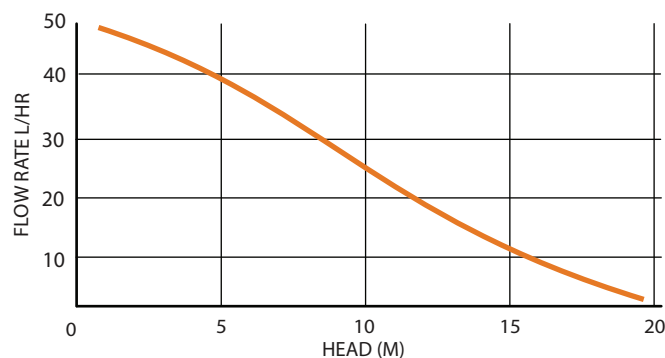

ALARM SIGNAL	MAX ALARM RATING
0 volt relay	5A 250v AC

INPUT VOLTAGE
100-240V AC, 50-60 Hz

INLET FITTING	OUTLET FITTING
Ø 40MM PUSH FIT/SOLVENT WELD FITTING.	Ø12MM OD HOSE TAIL