



MICROBLUE®



3 YEAR WARRANTY

PERFORMANCE

🔊 17dba

MAX FLOW	MAX HEAD	MAX LIFT
5 L/ HOUR	5 METRES	2 METRES

The MicroBlue® uses a revolutionary dynamic diaphragm control technology, allowing it to outperform other condensate pumps. The compact, anti-vibration design makes it suitable for conduit installations or similar discrete locations.

SENSING OPTION

MICROBLUE® pump available with:

RESERVOIR	FACIA KIT	DUCTING KIT
X86-001 (HLA-PACK) X86-002 (FSA PACK)	T18-016	X86-005 (IVORY) X86-006 (WHITE)



DYNAMIC OPERATION

Thanks to intelligent sensing technology the pump can dynamically adjust to condensate levels to operate in the quietest and most efficient possible way.



PUMP INTELLIGENCE

Reservoir and pump interconnectivity allows onboard intelligence to provide installers with accurate system analysis via a light display on the pump.



EASY INSTALL

Modular power supply design allows express installation, by simplifying the fiddly cable routing process.

DISCHARGE PIPE RUN




UNIT
3.5 KW

PERFORMANCE



DIMENSIONS (MM)

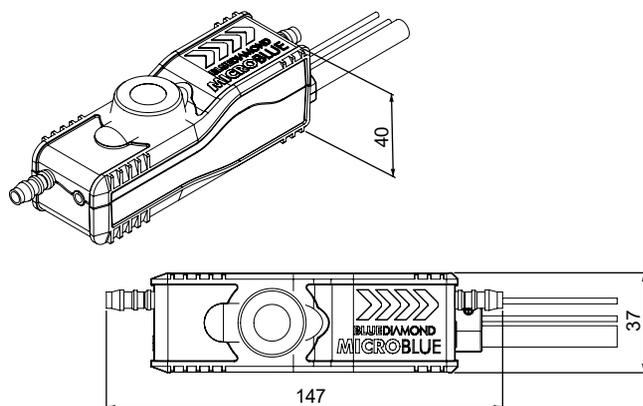

V (VERTICAL)	H (HORIZONTAL)
5 M	0 M
4 M	3 M
3 M	6 M
2 M	9 M
1 M	12 M

The MICROBLUE® can be mounted in any orientation up to 2m away from the air conditioning unit.