

# FLOWATCH® SILENCE DESIGN DT20 **SICCOM**

The quietest trunking pump in the world!  
A complete kit, with a quality trunking and all the accessories needed for installation! For air conditioners up to 20kW / 68000BTU.


Ref:DE20PMCE450



**PREMIUM**  
**NEW**




Hose diameter  
Suction : 5/7 mm - supplied  
Discharge : 6/9 mm - not supplied

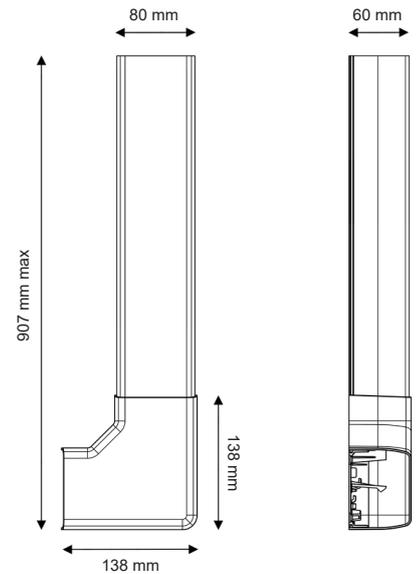

## SPECIFICATIONS

Flowrate max	20 l/h
Suction head max	3 m
Discharge head max	10 m
Electrical power	3W
Voltage	100-240V 50/60Hz
Alarm	NC
Noise level	16 dBA
Protection rating	IP64
Operating cycle*	100%
Power / alarm cable	1.6 m
Trunking dimensions	80 x 60 mm
Certifications	CE, UKCA, EAC

\* The pump is able to run 100% of the time if necessary.

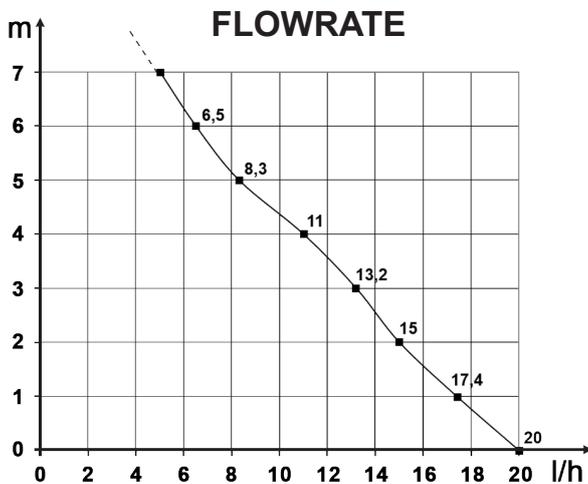


## CONTENTS

Trunking with elbow - Finishing gasket - Finishing ceiling plate - Pump in absorber bracket - Stop Siphoning - Reservoir with air-vent tube - Power / alarm cable - Inlet tube - Suction tube 0.25m - Screws and rawlplugs



Authorized Distributor  
APL ASIA CO., LTD.  
11/129-132 Moo.5 Lamlukka Rd., T.Kookut, A.Lamlukka, Pathumthani 12130 Thailand.  
TEL. 0-2995-4461-3, FAX. 0-2995-4464  
www.apl-asia.com EMAIL : sales@apl-asia.com LINE@ : @APL-ASIA

## BENEFITS



### Extreme silence

The trunking pump  
**THE MOST SILENT IN THE WORLD !**



### FLOWATCH® SILENCE DT20 included

Quite simply, the new standard on the market.

## DT20 TECHNO

### New Technology

Ultra-low power consumption, unrivalled silence, exceptional reliability... Tested and approved!

## 3W

### Very low power consumption

Only 3W power consumption, during operation only!



### Custom-made pump casing

For easy installation and perfect integration into the trunking.



### New trunking

A market-standard trunking system that's aesthetically pleasing, easy to install and comes with a wide range of accessories.



### Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

