



PORTABLE GAS LEAK DETECTOR

The AGH8100 & AGH8200 gas detector is designed to detect combustible gas leakage. The product sensor is optimized for methane and LPG gas detection compared to conventional combustible gas detectors. It can display $\mu\text{mol/mol}$ (ppm) and is sensitive to small leakage in the environment. The product is IP66 rated, sturdy and durable.

The AGH8100 has a built-in sampling pump and quick response. AGH8200 is diffusion type

Features


- Special design for methane & LPG ppm level gas leak detection, and short warm-up time.
- The $\mu\text{mol/mol}$ (ppm) level shows a sensitive reflection of traces of methane.
- Built-in pump makes the AGH8100 more sensitive and rapid, easy to use.
- Sound, light, vibration alarm method, effective warning.
- The TPU+PC housing, more wear-resistant.
- Ingressive protection in IP66 rating, dustproof and waterproof.



Specifications

Description	Specifications	AGH8100	AGH8200
Function			
gas detected	CH ₄ , LPG or other combustible gas	•	•
measure range	0-10000µmol/mol	•	•
response time	<5s	•	•
accuracy	≤±5%FS	•	•
detection principle	semiconductor	•	•
sampling method	built-in pump	•	-
	diffusion	-	•
Electric			
battery	rechargeable Li-battery 2200mAh	•	•
continuous operation	over 8 hours	•	•
Alarm			
alarm method	sound, LED light, vibration	•	•
sound intensity	>90dB	•	•
Display and Operation			
display	OLED	•	•
button	3 (LEFT, OK, RIGHT)	•	•
Environment			
ingress protection	IP66	•	•
operating temp.*	-10℃~55℃	•	-
	-40℃~60℃	-	•
operating humidity	≤93%RH	•	-
	10%-95%RH non-condensing	-	•
operating pressure	80-120kPa	•	•
Structure			
body material	PC+TPU	•	•
weight	about 0.34kg	•	-
	about 0.3kg	-	•
dimensions	500*67*42mm(H*W*D) include probe	•	•
Certificates			
EX	Exdib II CT4 Gb	•	•

Dimensions

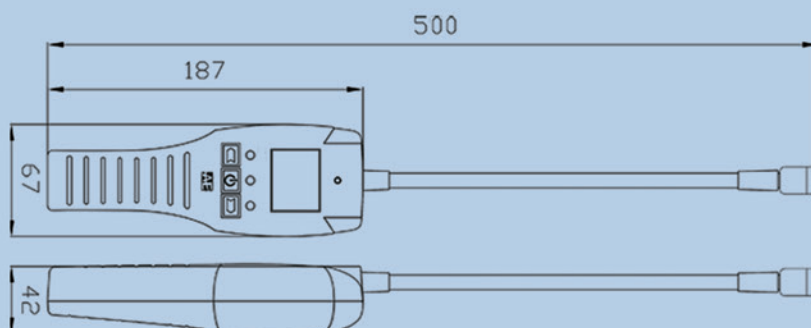



PORTABLE GAS DETECTOR

In the daily production of petrochemical engineering, steel, and chemical engineering industries, workers often encounter with flammable and toxic gases of various sorts, and accidents are easy to take place without proper safety protection. As a kind of personal safety protection instrument, portable gas detector plays an important role in industrial production safety.

The portable gas detector is small in size and easy to carry. It can be used for workshop routing inspection for side leakage, as well as in confined spaces such as flame operation inspection.



diffusion type gas detector




build-in pump gas detector



external pump gas detector

SELECTION GUIDE

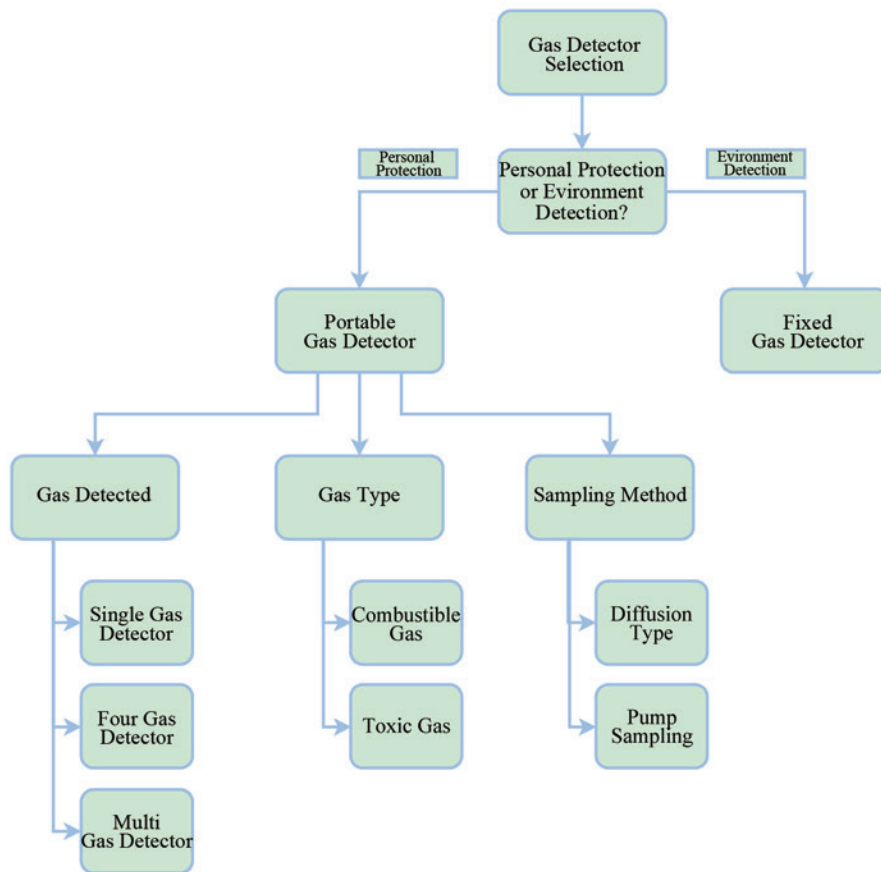

QUICK SELECTION TABLE 4 -- PORTABLE GAS DETECTOR

Description	AGH5100	AGH5100M	AGH6100	AGH6100F	AGH6200	AGH6200F	AGH8100	AGH8200
The number of sensors								
1	●	●	-	●	-	●	●	●
4 in 1	-	-	-	-	●	-	-	-
1~4, optional	-	-	●	-	-	-	-	-
Gas detected								
combustible gas-catalytic	-	-	●	●	●	●	-	-
combustible gas-semiconductor	-	-	-	-	-	-	●	●
toxic gas-electrochemical	●	●	●	-	●	-	-	-
toxic gas-PID	-	-	●	-	-	-	-	-
toxic gas-infrared	-	-	●	-	-	-	-	-
Sampling method								
diffusion	●	●	●	●	●	●	-	●
built-in pump	-	-	-	-	-	-	●	-
Certificates								
CPA	●	●	●	●	●	●	●	-
EX	●	●	●	●	●	●	●	●
ATEX	-	-	●	●	-	-	-	-
CCCF	-	-	-	-	-	●	-	-



QUICK SELECTION TABLE 5 -- GAS DETECTED

Gas	Measure Range	Principle	Resolution	AGH5100	AGH5100M	AGH6100	AGH6100F	AGH6200	AGH6200F	AGH8100	AGH8200
Combustible gas	EX	catalytic	1%LEL	-		●	●	●	●	-	-
Methane	CH ₄	Semiconductor	1μmol/mol	-		-	-	-	-	●	●
Oxygen	O ₂	Electrochemical	0.1%VOL	●	●	●	-	●	-	-	-
Carbon monoxide	CO	Electrochemical	1μmol/mol	●	●	●	-	●	-	-	-
Hydrogen sulphide	H ₂ S	Electrochemical	1μmol/mol	●	●	●	-	●	-	-	-
Chlorine	CL ₂	Electrochemical	0.1μmol/mol	●	-	●	-	-	-	-	-
Sulphur dioxide	SO ₂	Electrochemical	0.1μmol/mol	●	●	●	-	-	-	-	-
Ammonia	NH ₃	Electrochemical	1μmol/mol	●		●	-	-	-	-	-
Nitric oxide	NO	Electrochemical	1μmol/mol	●		●	-	-	-	-	-
Nitrogen dioxide	NO ₂	Electrochemical	0.1μmol/mol	●		●	-	-	-	-	-
Hydrogen chloride	HCL	Electrochemical	0.1μmol/mol	●		●	-	-	-	-	-
Ozone	O ₃	Electrochemical	0.01μmol/mol	●		●	-	-	-	-	-
Ethylene oxide	C ₂ H ₄ O	Electrochemical	0.1μmol/mol	●		●	-	-	-	-	-
Formaldehyde	CH ₂ O	Electrochemical	0.1μmol/mol	●		●	-	-	-	-	-
Methanol	CH ₃ OH	Electrochemical	0.1μmol/mol	●		●	-	-	-	-	-
Phosphine	PH ₃	Electrochemical	0.1μmol/mol	●		●	-	-	-	-	-
Hydrogen	H ₂	Electrochemical	1μmol/mol	●		●	-	-	-	-	-
Fluorine	F ₂	Electrochemical	0.01μmol/mol	●		●	-	-	-	-	-
Hydrogen fluoride	HF	Electrochemical	0.1μmol/mol	●		●	-	-	-	-	-
Hydrogen cyanide	HCN	Electrochemical	0.1μmol/mol	●		●	-	-	-	-	-
Phosgene	COCL ₂	Electrochemical	0.01μmol/mol	●		●	-	-	-	-	-
Arsenic hydride	AsH ₃	Electrochemical	0.01μmol/mol	●		●	-	-	-	-	-
Silane	SiH ₄	Electrochemical	0.1μmol/mol	●		●	-	-	-	-	-
Acrylonitrile	C ₃ H ₃ N	Electrochemical	0.1μmol/mol	●		●	-	-	-	-	-
Carbon disulfide	CS ₂	Electrochemical	0.1μmol/mol	●		●	-	-	-	-	-
Ethanol	C ₂ H ₅ OH	Electrochemical	0.1μmol/mol	●		●	-	-	-	-	-
Methane	CH ₄	Infrared	0.1%VOL	-		●	-	-	-	-	-
Carbon dioxide	CO ₂	Infrared	0.1%VOL	-		●	-	-	-	-	-
Toluene	C ₇ H ₈	PID	0.1μmol/mol	-		●	-	-	-	-	-
Xylene	C ₈ H ₁₀	PID	0.1μmol/mol	-		●	-	-	-	-	-
Benzene	C ₆ H ₆	PID	0.1μmol/mol	-		●	-	-	-	-	-
Acetic acid	C ₂ H ₄ O ₂	PID	1μmol/mol	-		●	-	-	-	-	-
Volatle organic compounds	VOC	PID	0.1μmol/mol 1μmol/mol	-		●	-	-	-	-	-

Note: 1, Any gas that not mentioned above, just contact AIYI Technologies for further information; 2, 1μmol/mol=1ppm



OFFICIAL WEBSITE



AIYI Technologies

TEL: 0086-25-87787361
WEB: www.AIYITEC.com

FAX: 0086-25-87787362
EMAIL: sales@autequ.com

Authorized Distributor:



Authorized Distributor
APL ASIA CO., LTD.
11/129-132 Moo.5 Lamlukka Rd., T.Kookut, A.Lamlukka, Pathumthani 12130 Thailand.
TEL. 0-2995-4461-3, FAX. 0-2995-4464
www.apl-asia.com
EMAIL: sales@apl-asia.com
LINE@: @APL-ASIA

Disclaimer: All pictures, configurations and parameters in this document are for reference only. There may be differences with the actual products. Any difference is subject to the latest real products.