eckerle



10 kW | 34 000 Btu

EE200

Super Silent Wall Unit

20 l/h
5,3 gal/h

10 m
32,8 ft

26 db(A) DIN EN 3745
~ < 19 db(A) DIN EN 3744

Description

- Low-noise membrane pump with 1.5 m power cord
- Integrated non-return valve prevents the backflow of condensate into the container
- Compact construction
- Attractive design
- Stylish wall cladding
- Easy installation


Advantages

- Low noise and energy consumption
- Multi-voltage (100-240V, 50/60Hz)
- Easy maintenance: the cover acts as a tank

Usage

The EE200 is designed to remove condensate water out of air conditioners. The pump can be installed directly under the air conditioning system on the left or right.

Performance

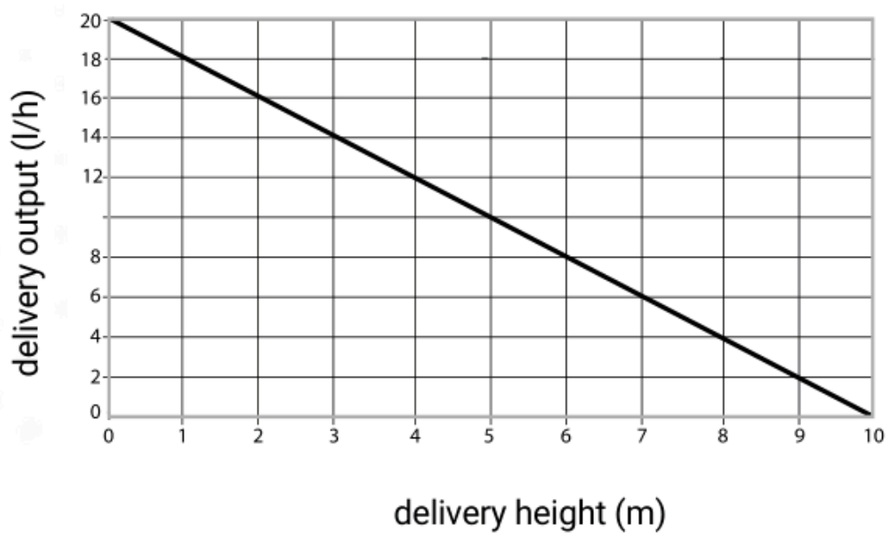

Inside the box

- pump
- 4x screws & 2x dowels for fixing
- straight hose connector
- silicon hose



Technical data

For air conditioners up to [kW]	10
Drive	Membrane pump
Mains voltage & frequency	100-240V, 50/60Hz
Power consumption [W]	Operation: 4 | Standby: 1,5
Max. flow rate [l/h]	20
Max. delivery height [m]	10
Pump unit L x W x H [mm]	315 x 54 x 43
Alarm switch	100-240V, 5A NC normally closed
Pressure hose [mm]	6 x 1,5

Installation video:

SCAN ME

APL ASIA CO., LTD. Authorized Distributor
Address: 11/129-132 Moo.5 Lamlukka Rd.,
T.Kookut, A.Lamlukka, Pathumthani 12130 Thailand.
TEL: 0-2995-4461-4
Website: www.apl-asia.com
EMAIL: sales@apl-asia.com
LINE@: @APL-ASIA

All indicated data serves only the product description and are not as characteristically understood in the legal sense. All data and specifications are subject to change.