ASPEN PUMPS

SILENT+ PUMPS




# Silent+ Mini Lime®

**CONDENSATE REMOVAL PUMP**

The next generation Silent+ Mini Lime has an anti-vibration damper and built-in sound absorbing materials. As well as a quick release reservoir, you can also commission the pump on site, and check operation via the LED system in the reservoir. Silence isn't golden, it's lime.

- 12L/h max. flow
- 10m max. rec. head (flow rate 6L/h)
- 20dB(A) @ 1m

## KEY FEATURES

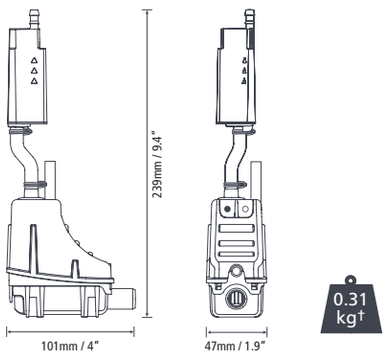
- Anti-vibration damper
- Pump sits in trunking elbow
- LEDs provide visual operating feedback

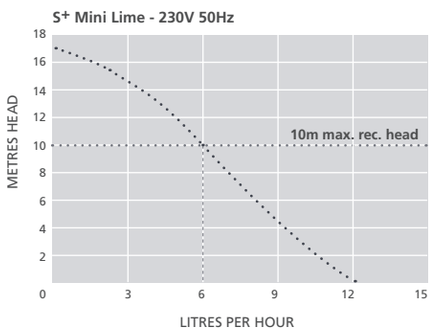
## SUITABILITY



- Up to 16kW / 54,000Btu/h
- High wall split systems
- Left or right install with range of trunking systems

✓ **Perfect for...** Commercial use where silence is important




## SUGGESTED XTRA ACCESSORIES

| Description | | Part No. |
|---|---|---|
| 1 Amp Fuse |  | FP2620 |
| Tube To Soil Stack Adaptor |  | FP2038 |
| Vinyl Tube Braided 1/4" (6mm) |  | AX5100 |





Xtra For more installation accessories take a look at our Aspen Xtra range

## SILENT+ MINI LIME @ 230 VAC 50Hz

| | |
|---|---|
| Max. flow | 12L/h @ 0m head |
| Max. rec. head | 10m |
| dB(A) @ 1m | 20* |
| Power supply | 230 VAC, 0.1A, 16W, 50/60Hz |
| Rated | Non continuous |
| Class | II appliance ⧈ |
| Max. unit output | 16kW / 54,000Btu/h |
| Max. water temp | 40°C / 104°F |
| Discharge tube | 6mm ID |
| IP Protection | IP24 |
| Safety switch | 5.0A N.C. / N.O.** |
| Thermal protection | ✓ |
| Self priming | ✓ |

*Assuming solid wall construction with a 2kW unit.
** 5.0A volt free with Normally Closed/Normally Open contacts. Default factory set to Normally Closed mode.

## SILENT+ MINI LIME SYSTEM OPTIONS

| System | | Colour | Part No. |
|---|---|---|---|
| Option 1 |  | Ivory | FP3312/3 |
| " | | White | FP3319/3 |
| Option 2 |  | Ivory | FP3316/3 |
| " | | White | FP3320/3 |
| Option 3 |  | Ivory | FP3317/3 |
| " | | White | FP3321/3 |
| Option 4 |  | Ivory | FP3315/3 |
| " | | White | FP3314/3 |
| Option 5 (EU only) |  | White | FP3327/3 |
| Silent+ Mini Lime Replacement† | | | FP3322/3 |

† Pump only – no trunking included

## IN THE BOX

Silent+ Mini Lime pump (including 1.5m hard wired power cable) • Anti-vibration pulse damper, anti-siphon device • 500mm Lime green inlet hose 14mm ID • 40mm Vinyl breather tube 6mm ID • Elbow front and back • 800mm Conduit front and back • Internal conduit sleeve (Option 1 Slimline system only) • Gasket (Option 1 Slimline, Option 2 and Option 3 Inoac systems only) • Ceiling plate • Drain connector kit • Fixing kit • Install manual

Download manual at aspenpumps.com

View install video at aspenpumps.com

Information correct at time of going to press.