ASPEN PUMPS

## THE NEW SILENT+ MINI ORANGE

# BETTER THAN EVER

The world's No.1 Orange Mini Pump is perfect for ducted units; floor standing & chassis units; high wall split systems. Ideally installed within a ceiling void or similar area. Quietly Brilliant.











**Ultra quiet – as low as 16dB(A)***
Variable speed, on demand power, unique sophisticated pump control algorithm = silence. No need for acoustic dampers, or anti-vibration mounting kits.

**Proven 5th Gen Technology**
Capacitance Sensing & Rotary Diaphragm = Silence & Power – up to 35L/h flow rate!

**Low maintenance**
Adaptive flow rates and on demand power means less stress on components.

**Plug & Play****
Perfect for rapid replacement of the pump.

**Backed with a 3 year guarantee**

**Aspen Pumps Silent+ Mini Pumps**
All as low as 16 dB(A). We offer the quietest range of mini pumps in the world, for all applications.

UNIVOLT

* Assuming solid wall construction with a 2kW unit

** New pumps are not backwards compatible with previous / current models.

ASPEN PUMPS

SILENT+ PUMPS




# Silent+ Mini Orange®

## CONDENSATE REMOVAL PUMP

The world's No.1 Orange mini pump is now better than ever. Using our proven 5th Gen Technology, the Silent+ Mini Orange boasts sound levels as low as 16dB(A)*. So quiet it eliminates the need for additional noise or vibration dampers. Capacitance sensor technology, provides intelligent, adaptive flow rates. Quietly brilliant.

- 35L/h max. flow
- 10m max. rec. head
- As low as 16dB(A)*


### Key Features

- Proven 5th Gen Technology: Capactance Sensing & Rotary Diaphragm = Silence & Power
- Low maintenance
- Plug and play**
- 3 year warranty

### Suitability

- Up to 40kW / 136,000Btu/h
- Ducted units; floor standing & chassis units; high wall split systems
- ***Perfect for...*** small commercial and residential units

0.391 kg

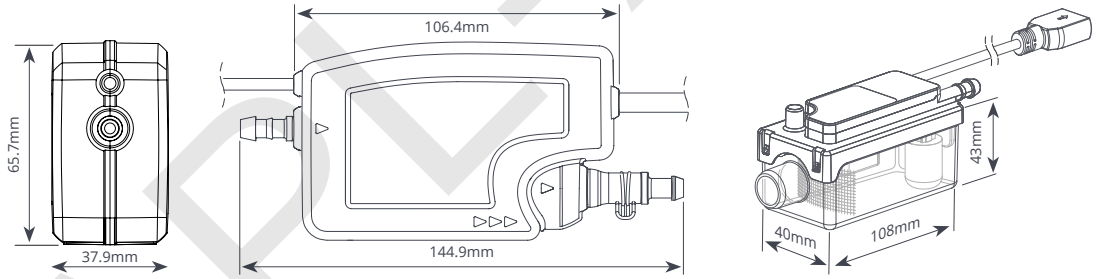



### SPECIFICATIONS

| | |
|---|---|
| Max. flow | 35L/h @ 0m head |
| Max. rec. head | 10m |
| Max. suction lift | 1.5m |
| Min. dB(A) @ 1m | 16dB(A)* |
| Power supply | 100-250VAC, 0.18A, 2.4W, 50/60 Hz |
| Rated | Continuous |
| Class | II ⧈ |
| Max. unit output | 40kW (136,000Btu/h) |
| Max. ambient temp | 40°C (104°F) |
| IP Protection | IP24 |
| Inlet o/d | Ø16mm (5/8") |
| Outlet o/d | Ø6mm (1/4") |
| Safety switch | 5.0 A Normally closed |
| Self priming | ✓ |

*Assuming solid wall construction with a 2kW unit

**Not backwards compatible

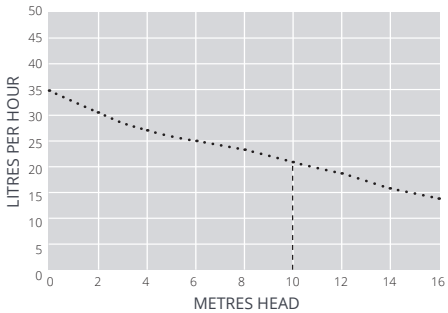


### OPTIONS

| | |
|---|---|
| Silent+ Mini Orange (5th Gen, Europe) | FP3430 |

### IN THE BOX

Silent+ Mini Orange 5th Gen pump • Resevoir (inc. filter and lid) • 1.5m plug and play cable** • 1.5m clear PVC tube • 150mm clear vent hose • 220mm Orange inlet hose • Drain connector kit: straight connector and rubber elbow • Quick start guide

Download full manual at aspenpumps.com

### SUGGESTED XTRA ACCESSORIES

| Description | Part No. |
|---|---|
| Hose Clamp 10.1 dia. (x10) | B3340 |
| S+ Mini Pump spare filters (x10) | FP3330 |
| Barbed anti-siphon device | FP3336/1 |
| Reservoir copper mesh filter (x10) | FP3460 |

Visit aspenpumps.com for more installation accessories.

Information correct at time of going to press. Not all products are available in all regions.