



Silent⁺ Mini White

CONDENSATE REMOVAL PUMP

Incredibly quiet, easy to install and maintain, the Silent⁺ Mini White has been designed to fit either side of the evaporator unit. A double insulated reservoir eliminates condensation and is simple to unclip for cleaning and maintenance.



45L/h max. flow



10m max. rec. head
(flow rate 23L/h)




As low as 16dB(A)
when operating

KEY FEATURES

- Ultra quiet operation
- Extra quick to fit
- Compact & discreet
- Removable reservoir


SUITABILITY

- Up to 16kW / 54,000Btu/h
 - High wall mini split systems
- ✓ **Perfect for...** domestic environments where minimising audible noise is crucially important

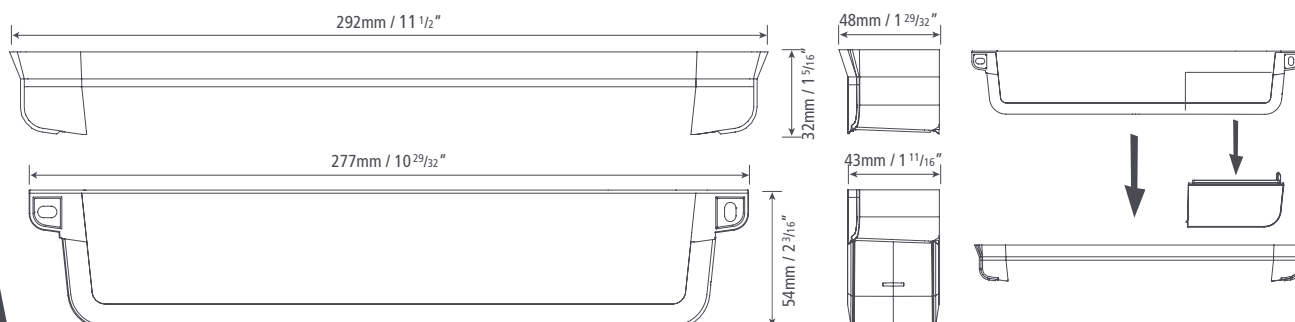

SILENT⁺ MINI WHITE @ 230 VAC 50Hz

| | |
|--------------------------|---------------------------------|
| Max. flow | 45L/h @ 0m head |
| Max. rec. head | 10m |
| Min. dB(A) @ 1m | 16 |
| Power supply | 230 VAC, 0.18A, 2.1W 50/60Hz |
| Rated | Continuous |
| Class | II appliance |
| Max. unit output | 16kW / 54,000Btu/h |
| Max. ambient temperature | 40°C / 104°F |
| IP Protection | IP24 |
| Inlet o/d | 16mm (5/8") – 26mm (1") |
| Outlet o/d | Ø6mm / 1/4" |
| Safety switch | 5.0 A NO & NC contacts |
| Thermal protection | ✓ |
| Self priming | ✓ |

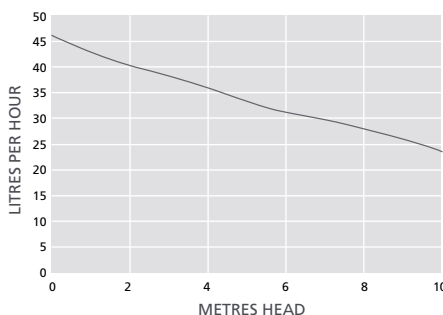

IN THE BOX

Silent⁺ Mini White pump (incl. hard wired 1m power cable) • Fitting template • Outlet elbow • Screw caps • Spacer • Installation manual

Download manual at aspenpumps.com

SILENT⁺ MINI WHITE OPTIONS

Silent⁺ Mini White (Europe) FP3450

SUGGESTED XTRA ACCESSORIES

| Description | Part No. |
|----------------------------|----------|
| 1 Amp Fuse | FP2620 |
| Tube To Soil Stack Adaptor | FP2038 |



For more installation accessories take a look at our Aspen Xtra range

Ensure ALL cleaning chemicals are flushed out of the reservoir after use.

Information correct at time of going to press.